

6

5




4

3

2


1

### CABLE SPECIFICATIONS

DESCRIPTION	COLOR CODE	NOMINAL O.D.	OVERALL RATING	COLOR	APPROVAL
16/3 SJT 105°C, VW-1	NORTH AMERICAN	8.5	13A 125V	BLACK	  OR 

#### NOTES:


1. Cords are to be individually bagged.

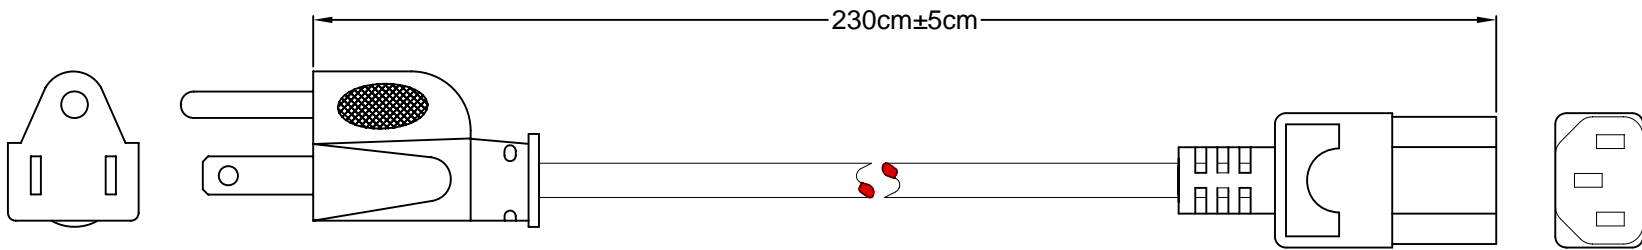

NEMA 5-15P



IEC 60320 C13

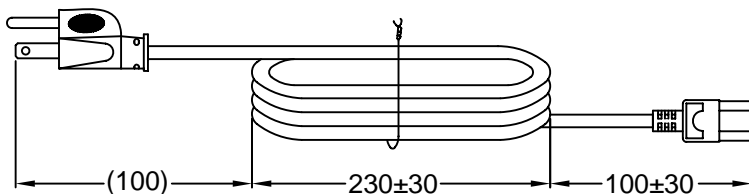

HANKING DETAIL

**RoHS  
COMPLIANT**

REV	DATE	CHANGE	CHNG		CHKD		APPR	
			PB	TD	PB	TD	PB	TD
A	12/18/99	UPDATED DRAWING	PB	TD	PB	TD	JJ	JJ
B	11/15/00	ADD APPROVALS & PACK SPEC.	PB	TD	PB	TD	JJ	JJ
C	12/13/01	REVISED / UPDATED	GQ	PB	GQ	PB	PB	PB
D	06/27/02	DNM 230 WAS 183	GQ	TD	GQ	TD		
E	6/22/08	TEMP. RATING WAS 75°C	PB		PB			

TOLERANCE IN MM UNLESS OTHERWISE SPECIFIED	
> 1000	± 50
≤ 1000	± 30
STRIPPED LENGTH	± 2
DRAWN BY	AH
DATE:	1/10/94
CHECK BY	LFH
DATE:	12/10/98
APPR BY	SS
DATE:	12/10/98

**Power Dynamics, Inc.**  
 Phone: 973-560-0019 Whippany, New Jersey Fax: 973-560-0076

PART: AMERICAN CORD SET; 230cm LONG  
 NEMA 5-15P TO IEC 60320 C13; 16/3 SJT

**10087**

PART #: 10087

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY  
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1

REV: E