

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: impact resistance Polypropylene, UL 94V-HB rated, color black

Contact & terminals:

PDSN-12C: Brass, Nickel plated




PDSN-12D: Brass, Nickel plated

Spring: Spring Steel, Nickel plated imbedded in Polypropylene


MECHANICAL SPECIFICATIONS:

Operating temperature: -5°C to +83°C


**RoHS
COMPLIANT**

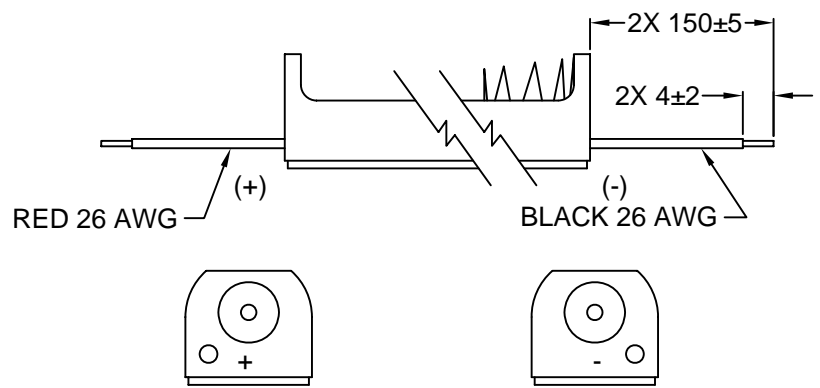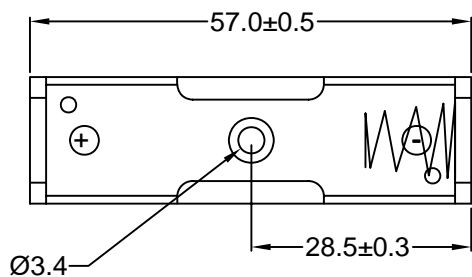

PDSN-12A WIRE LEADS

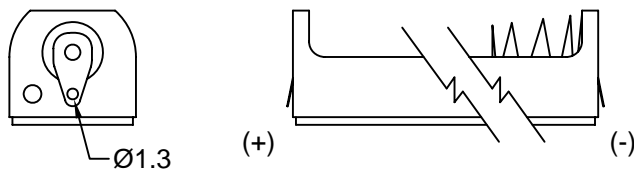

PDSN-12C SOLDER LUGS

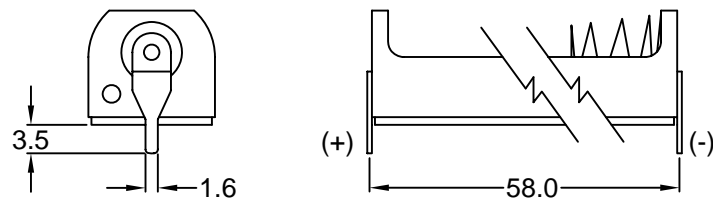

PDSN-12D P.C. PINS

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 'AA' BATTERY HOLDER, 1 CELL

REVISIONS	CHNG	CHK	APPR
	CHANGE	UPDATED DWG	GO. PB
	DATE	9/10/01	
REV	A		

DRAWN BY	TM	DATE:	03/21/94
CHECK BY	PB	DATE:	09/10/01
APPR BY	TD	DATE:	09/11/01

PDSN-12X		SHEET	1 of 1
PART #:		SCALE:	NTS
SIZE:	A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	
REV:	A		

6

5

4

3

2

1