

6

5

4

3

2

1

MATERIAL AND FINISH:



Insulator: Glass filled Nylon, black, UL-94-HB rated

Contacts: Clean Nickel Silver



ENVIRONMENTAL

Operating temperature: -30°C TO +70°C

RoHS
COMPLIANT

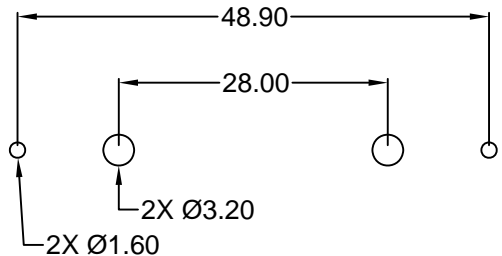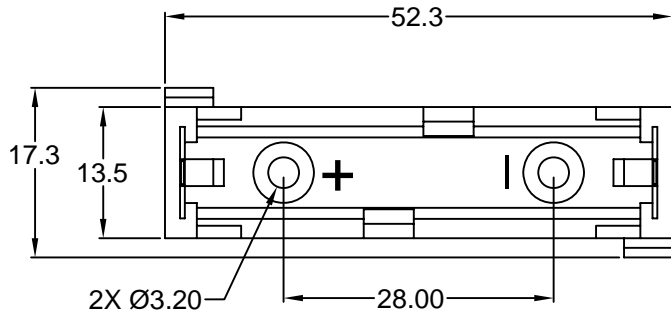

RECOMMENDED
PCB MOUNT

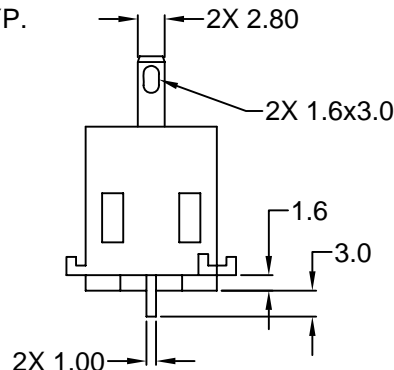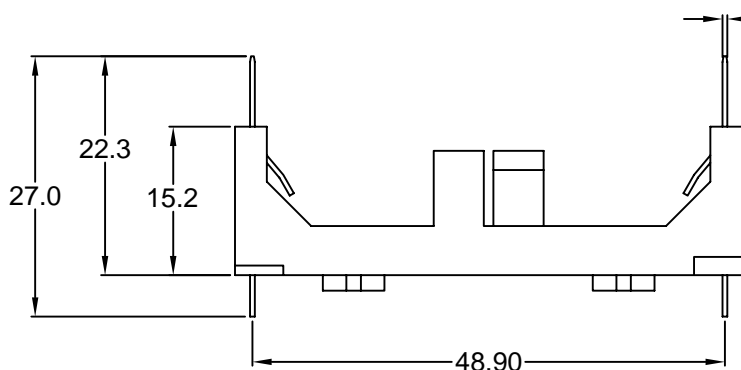

REV	DATE	CHANGE	CHKG	CHKD	APPR

REVISIONS

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	GQ	DATE: 02/25/02
CHECK BY	TD	DATE: 02/26/02
APPR BY	PB	DATE: 02/26/02

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 1 CELL AAA (R03) BATTERY HOLDER, PCB/
BASEBOARD MOUNT, SOLDER TERMINALS

PART #: B34		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	
SCALE: NTS		REV: