

6

5

4

3

2

1

**MATERIAL AND FINISH:**





Insulator: Impact resistance Polypropylene, black,  
UL-94V-HB rated  
PDSN-11-1A (wire leads): PVC, 26 AWG  
Contact & terminals:  
PDSN-11-1C: Brass, Nickel plated

Spring: Spring Steel, Nickel plated imbedded in  
Polypropylene


**ENVIRONMENTAL:**

Operating temperature: -5°C to +83°C

RoHS  
COMPLIANT

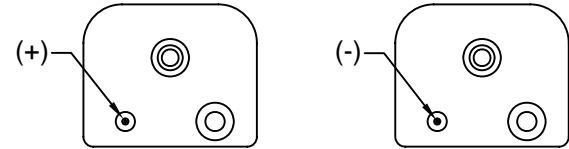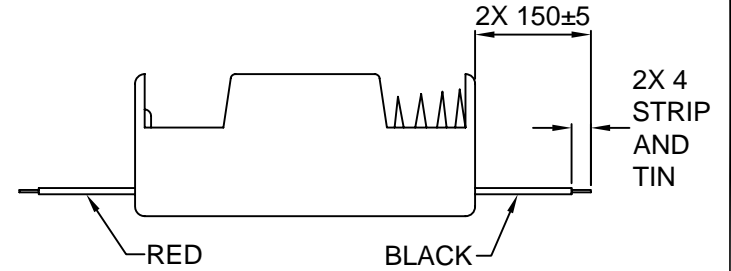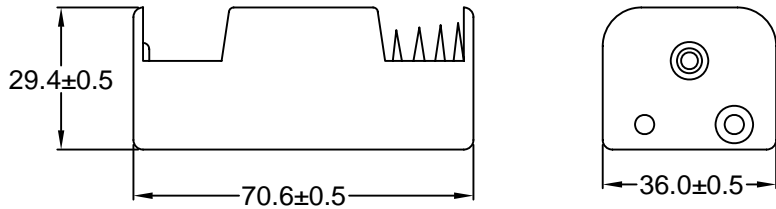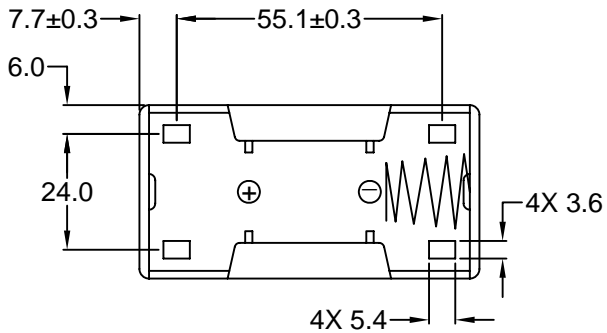

PDSN-11-1A WIRE LEADS

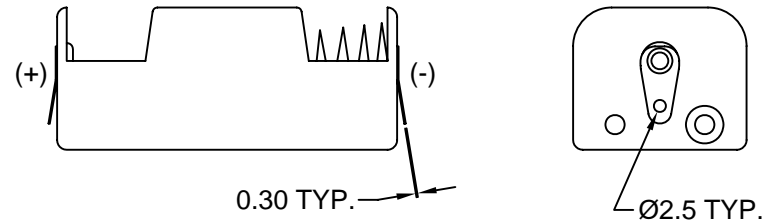

PDSN-11-1C SOLDER LUGS

REV	DATE	CHANGE	CHNG	CHK	APPR

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	GQ	DATE: 05/24/02
CHECK BY	TD	DATE: 05/30/02
APPR BY	PB	DATE: 05/30/02

**Power Dynamics, Inc.**  
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 1 CELL TYPE "D" BATTERY HOLDER

PART #: PDSN-11-1X		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV:
SCALE: NTS		

6

5

4

3

2

1