

6

5

4

3

2

1

MATERIAL AND FINISH:





Insulator: Glass filled Nylon, black, UL-94-V2 rated

Contacts: Brass, Clean Nickel Silver plated

ENVIRONMENTAL

Operating temperature: -30°C TO +70°C

RoHS
COMPLIANT

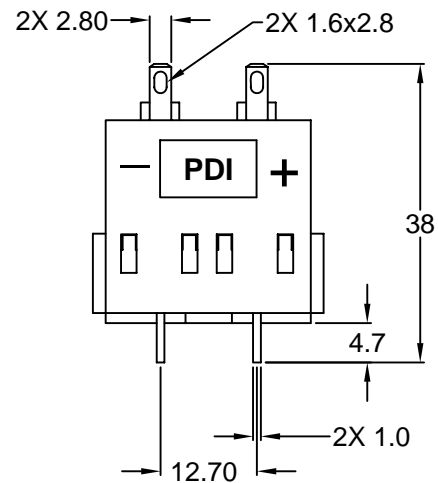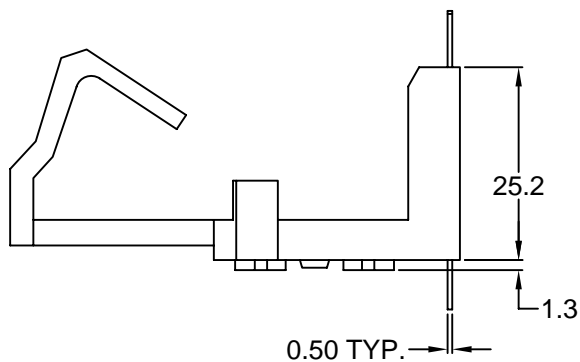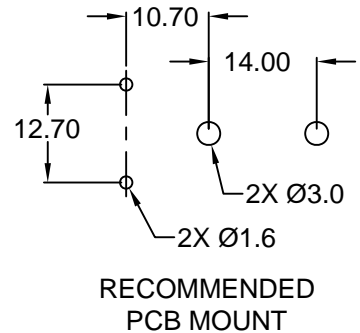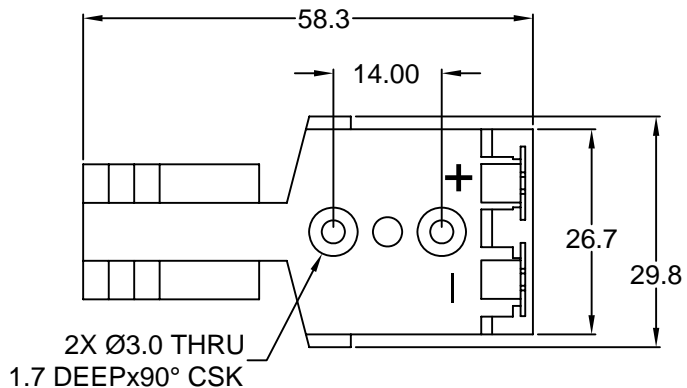

REVISIONS	CHNG	CHK	APPR
	DATE	REVISED / UPDATED	GO. TD. PB.
	A	02/28/02	

TOLERANCE UNLESS OTHERWISE SPECIFIED			
X	± 1		
X.X	± 0.4		
X.XX	± 0.20		
DRAWN BY	PB	DATE:	12/16/99
CHECK BY	TD	DATE:	12/29/99
APPR BY	JJ	DATE:	12/29/99

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 1 CELL PP3 (6R61) 9V BATTERY HOLDER,
 PCB/BASEBOARD MOUNT, SOLDER TERMINALS

B33

SIZE: A
 SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1
 REV: A