

**MATERIAL AND FINISH:**

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated

PDSN-22A (wire leads): PVC, 26 AWG

Contact & terminals:

PDSN-22B: Brass, Nickel plated


PDSN-22C: Brass, Nickel plated

PDSN-22D: Steel, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in Polypropylene

**ENVIRONMENTAL:**


Operating temperature: -5°C to +83°C

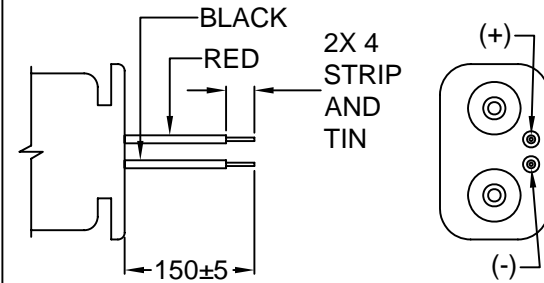


PDSN-22A WIRE LEADS

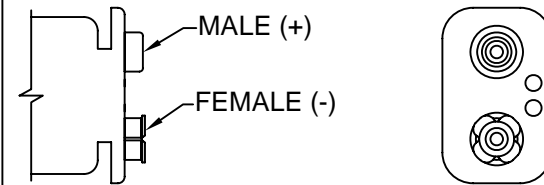



PDSN-22B SNAP TERMINAL

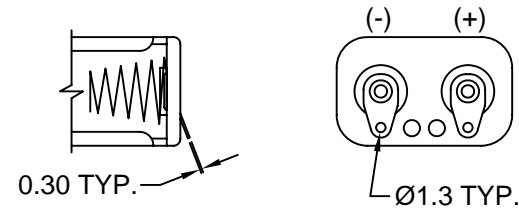




PDSN-22C SOLDER LUGS

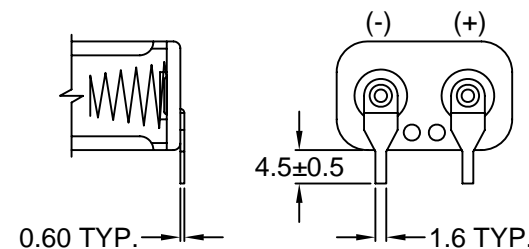

PDSN-22D PCB PINS

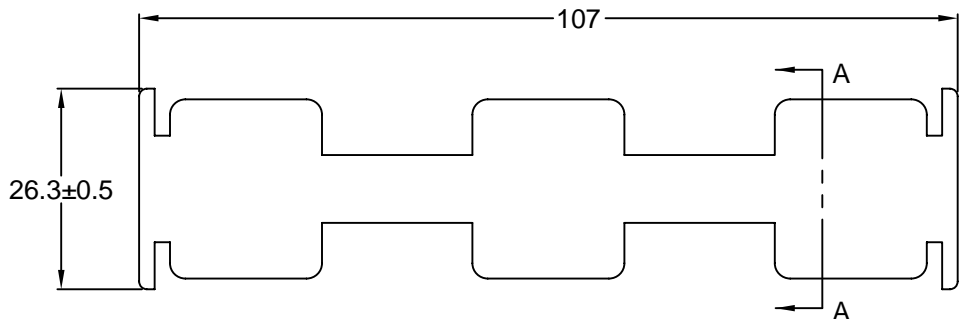

SECTION A-A

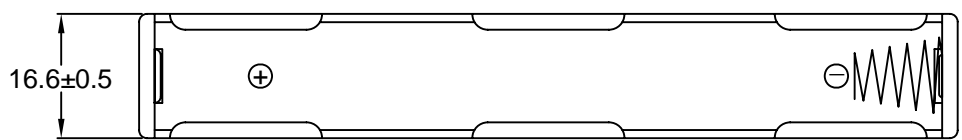

TOLERANCE UNLESS OTHERWISE SPECIFIED

X	± 1
X.X	± 0.4
X.XX	± 0.20

**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 4 CELL TYPE "AA" BATTERY HOLDER

DRAWN BY	GQ	DATE:	04/05/02
CHECK BY	TD	DATE:	04/24/02
APPR BY	PB	DATE:	04/24/02

<b>PDSN-22X</b>		<b>SHEET 1 of 1</b>
PART #:		
SIZE:	A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS
SCALE:	NTS	
REV:		

D

C

B

A

REV	DATE	CHANGE	CHNG	CHK	APPR