

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated

PDSN-26A (wire leads): PVC, 26 AWG

Contact & terminals:


PDSN-26B: Brass, Nickel plated

PDSN-26C: Brass, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

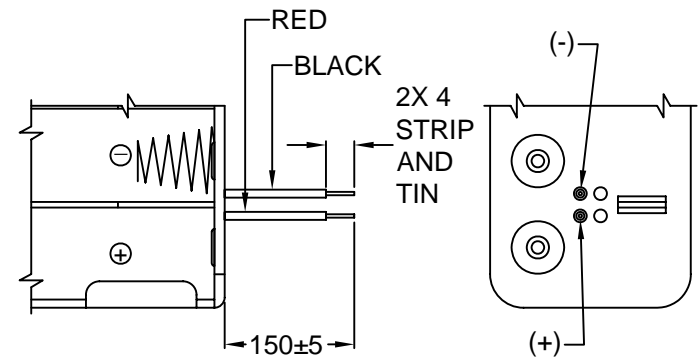


PDSN-26A WIRE LEADS

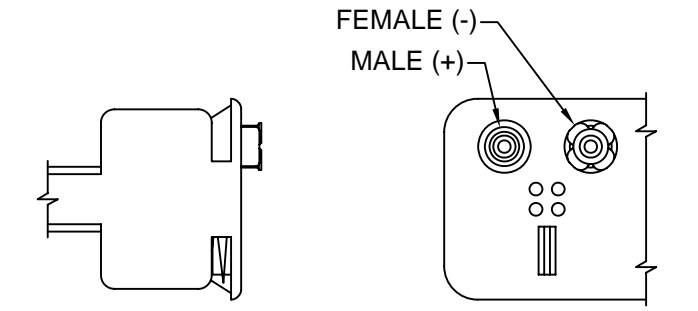


PDSN-26B SNAP TERMINAL

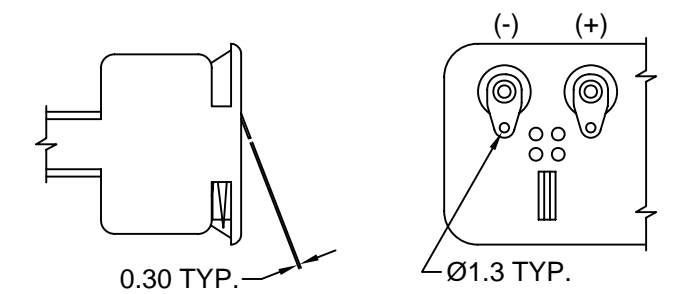



PDSN-26C SOLDER LUGS

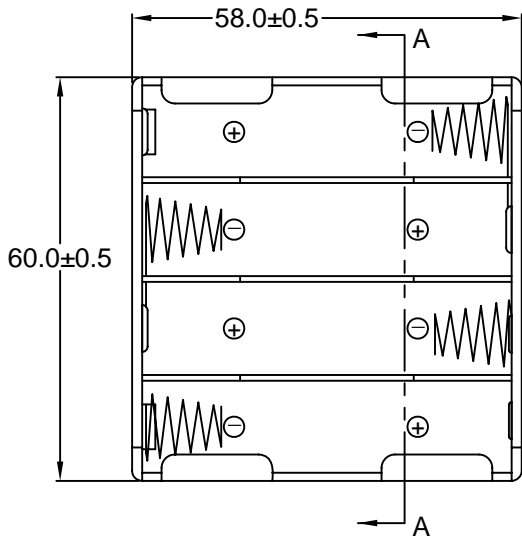

8X "AA" BATTERIES

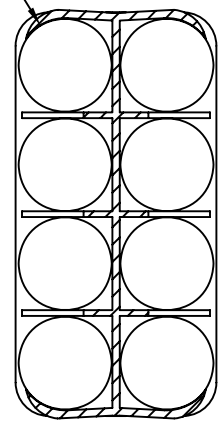

SECTION A-A

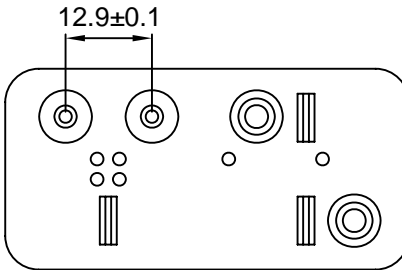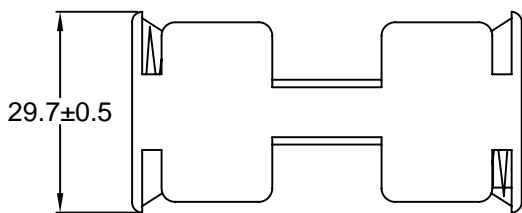

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	GQ	DATE: 04/17/02
CHECK BY	TD	DATE: 05/09/02
APPR BY	PB	DATE: 05/09/02

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 8 CELL TYPE "AA" BATTERY HOLDER
 SIDE BY SIDE

PDSN-26X

PART #: PDSN-26X
 SIZE: A
 SCALE: NTS

SHEET 1 of 1

ALL DIMENSIONS FOR REFERENCE ONLY
 DIMENSIONS ARE IN MILLIMETERS

REV:

D

C

B

A

REVISIONS	CHANGE	CHKG	CHKD	APPR
REV	DATE			