

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Impact resistance Polypropylene, black,
UL-94V-HB rated

PDSN-14A (wire leads): PVC, 26 AWG

Contact & terminals:





PDSN-14B: Brass, Nickel plated

PDSN-14C: Brass, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in
Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

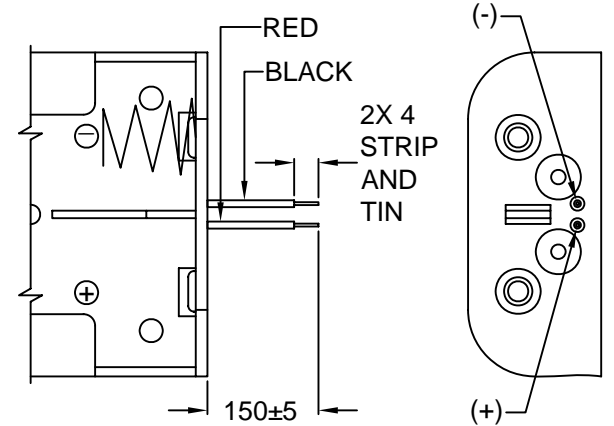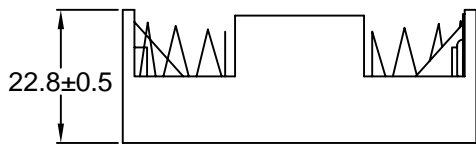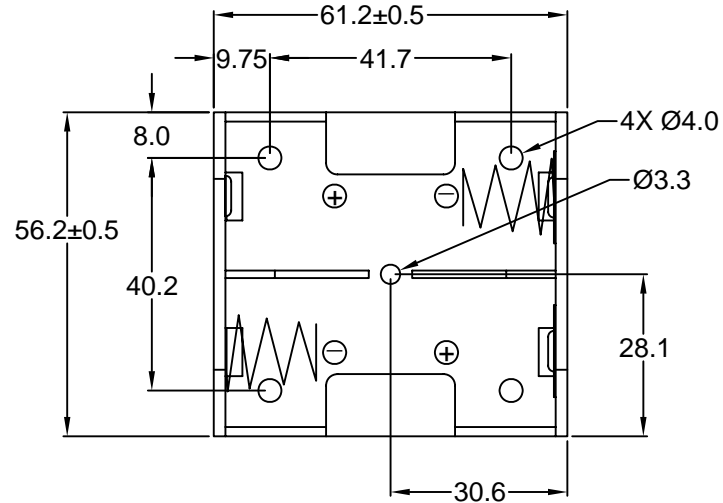

PDSN-14A WIRE LEADS

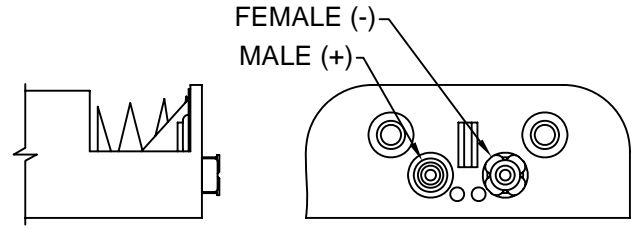

PDSN-14B SNAP TERMINAL

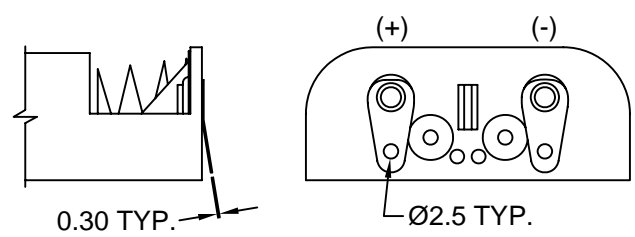

PDSN-14C SOLDER LUGS

D

C

B

A

REVISIONS	CHANGE	CHKG	CHK	APPR
REV	DATE			

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 2 CELL TYPE "C" BATTERY HOLDER

DRAWN BY	GQ	DATE:	05/09/02
CHECK BY	TD	DATE:	05/14/02
APPR BY	PB	DATE:	05/14/02

PDSN-14X		SHEET
PART #:		1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY	
SCALE: NTS	DIMENSIONS ARE IN MILLIMETERS	
REV:		