

MATERIAL AND FINISH:

Insulator: Impact resistance Polypropylene, black,
UL-94V-HB rated

PDSN-24-3A (wire leads): PVC, 26 AWG



Contact & terminals:

PDSN-24-3C: Brass, Nickel plated




Spring: Spring Steel, Nickel plated imbedded in
Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

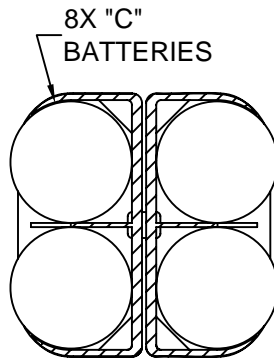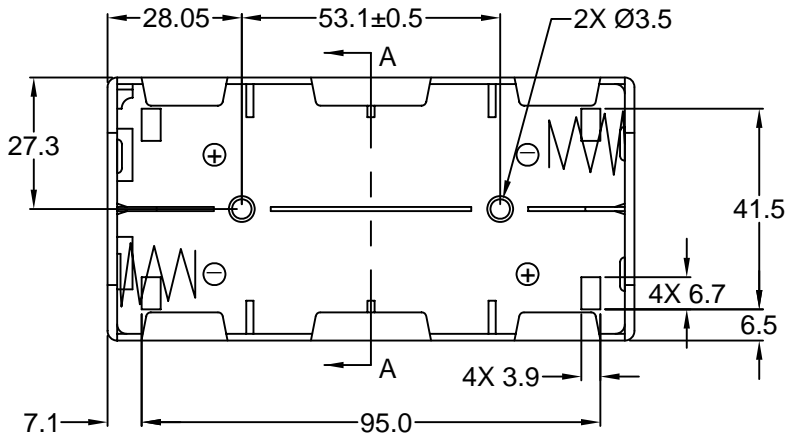

SECTION A-A

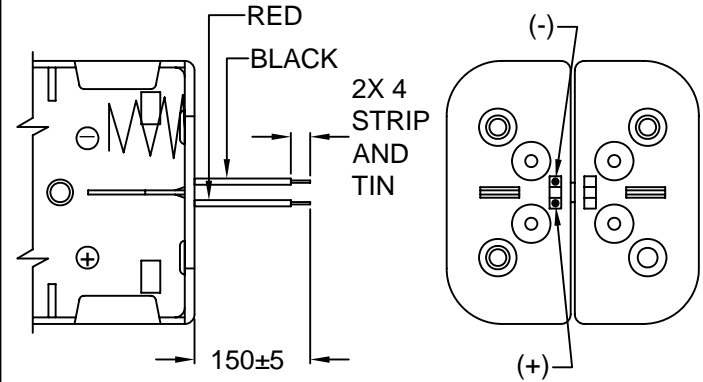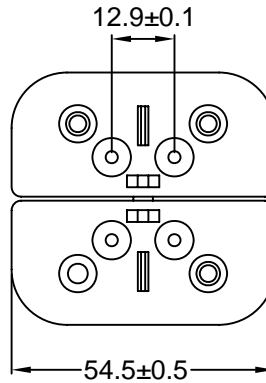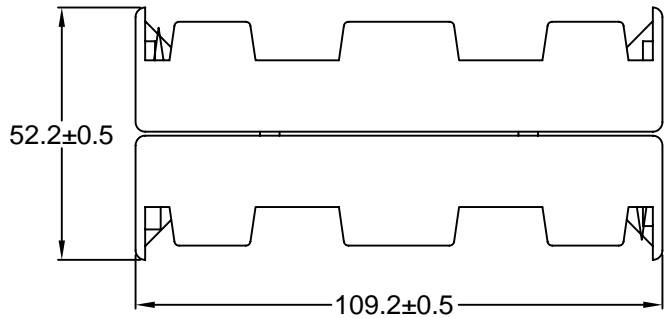

PDSN-24-3A WIRE LEADS

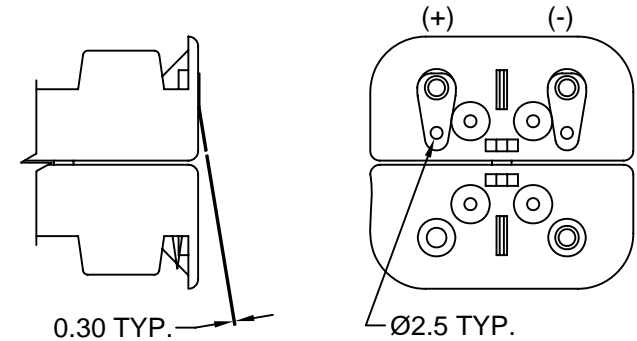

PDSN-24-3C SOLDER LUGS

REV	DATE	CHANGE	CHKNG	CHKCK	APPR

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	GQ	DATE: 05/15/02
CHECK BY	TD	DATE: 05/16/02
APPR BY	PB	DATE: 05/16/02

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 8 CELL TYPE "C" BATTERY HOLDER
SIDE BY SIDE

PART #: PDSN-24-3X		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV:
SCALE: NTS		