

6

5

4






3

2


1

MATERIAL AND FINISH:
 Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated
 PDSN-28-1A (wire leads): PVC, 26 AWG
 Contact & terminals:
 PDSN-28-1B: Brass, Nickel plated
 PDSN-28-1C: Brass, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in Polypropylene
ENVIRONMENTAL:
 Operating temperature: -5°C to +83°C

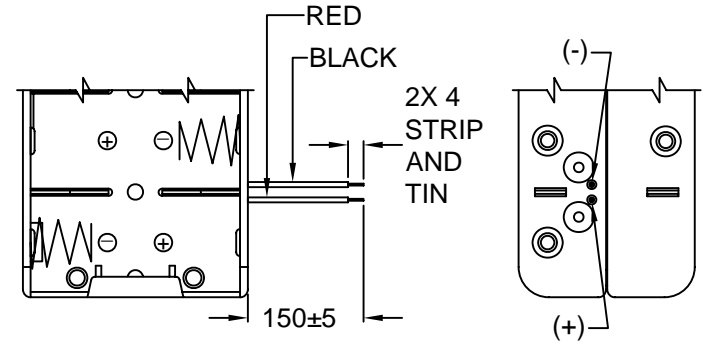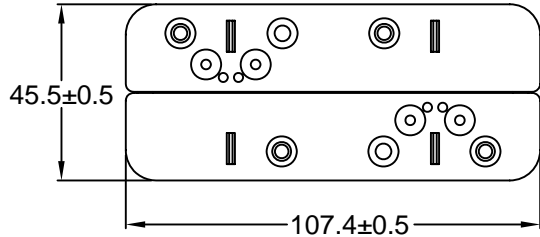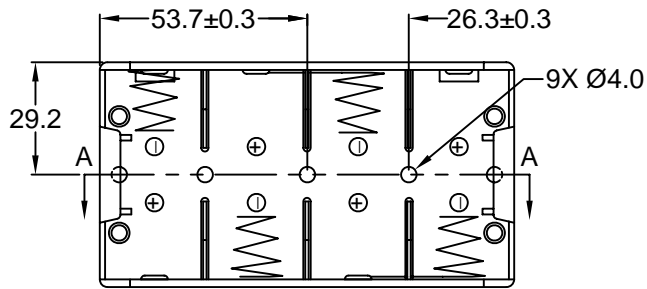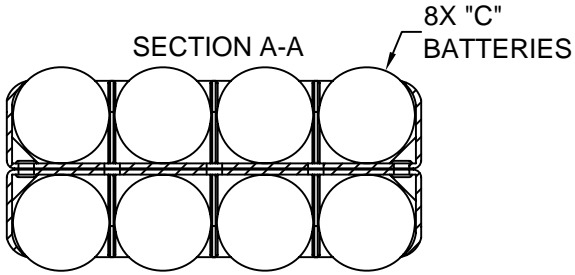

PDSN-28-1A WIRE LEADS

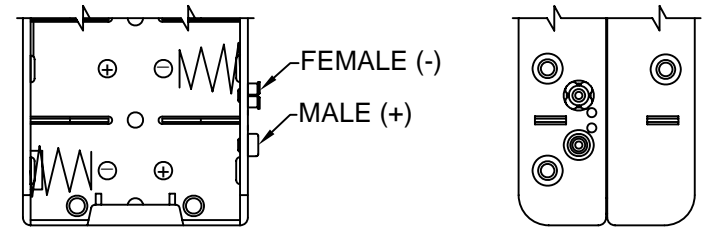

PDSN-28-1B SNAP TERMINAL

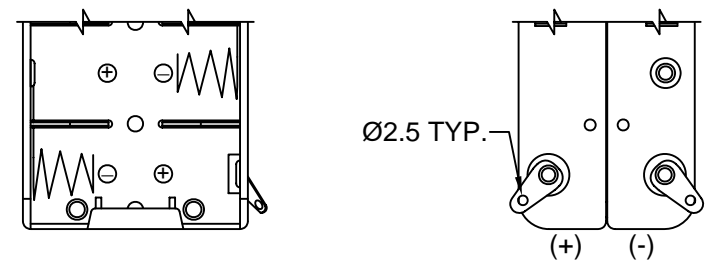

PDSN-28-1C SOLDER LUGS

REVISIONS

REV	DATE	CHANGE	CHNG	CHK	APPR
D6	3/25	MATERIAL CHANGE	TM	KH	SS
B	2/17/00	UPDATED DRAWING	PB	JJ	SS
C	05/22/02	UPDATED / REVISED	GC	TD	PB

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20
DRAWN BY	TM
DATE:	3/21/94
CHECK BY	KH
DATE:	3/21/94
APPR BY	SS
DATE:	3/21/94

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 8 CELL TYPE "C" BATTERY HOLDER
 SIDE BY SIDE

PART #: PDSN-28-1X		SHEET 1 of 1
SIZE: A	SCALE: NTS	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS
REV: C		