

6

5

4

3

2

1

**MATERIAL AND FINISH:**

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated

PDSN-14-2A (wire leads): PVC, 26 AWG

Contact & terminals:

PDSN-14-2B: Brass, Nickel plated

PDSN-14-2C: Brass, Nickel plated

Spring: Spring Steel, Nickel plated imbedded in Polypropylene


**ENVIRONMENTAL:**

Operating temperature: -5°C to +83°C




**NOTE:**


Wire jumper for PDSN-14-2A and PDSN-14-2B

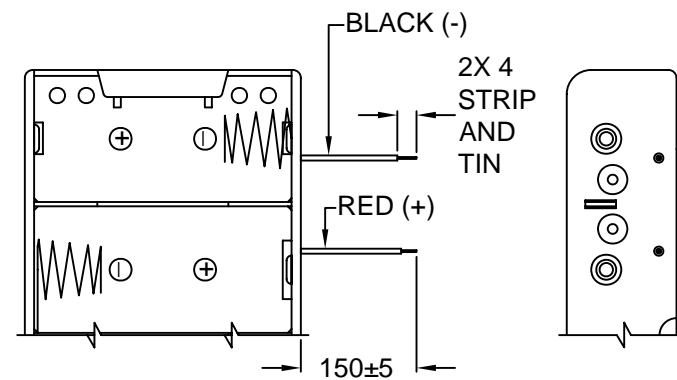




PDSN-14-2A WIRE LEADS

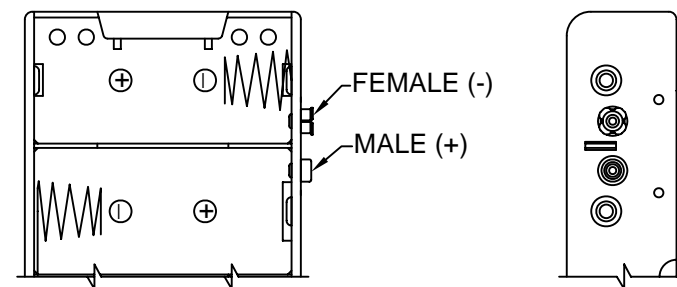

PDSN-14-2B SNAP TERMINAL

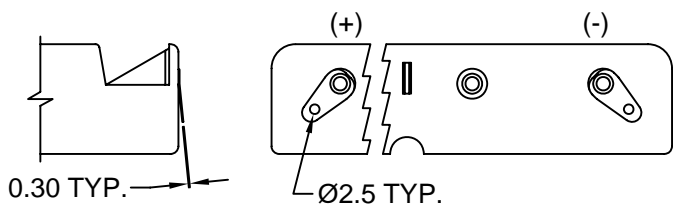

PDSN-14-2C SOLDER LUGS

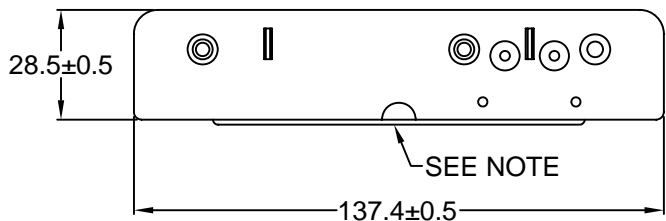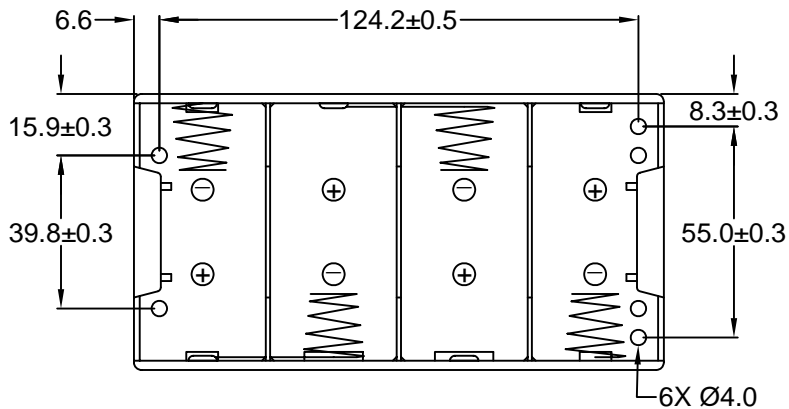

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	GQ	DATE: 05/29/02
CHECK BY	TD	DATE: 5/30/02
APPR BY	PB	DATE: 05/30/02

**Power Dynamics, Inc.**  
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 4 CELL TYPE "D" BATTERY HOLDER

**PDSN-14-2X** SHEET 1 of 1  
 PART #: PDSN-14-2X  
 SIZE: A ALL DIMENSIONS FOR REFERENCE ONLY  
 SCALE: NTS DIMENSIONS ARE IN MILLIMETERS  
 REV:

REVISIONS	CHNG	CHECK	APPR
	CHANGE		
	DATE		

D

C

B

A