

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: PC (Polycarbonate), color black, UL-94V-0 rated

Contacts: Brass, Tin Plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A

Voltage rating: 250 VAC








Current rating: 15 A

Voltage rating: 250 VAC



RoHS COMPLIANT

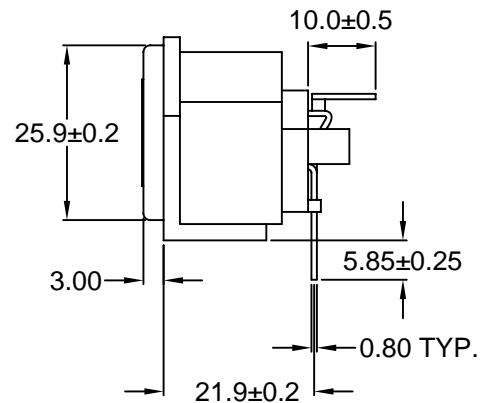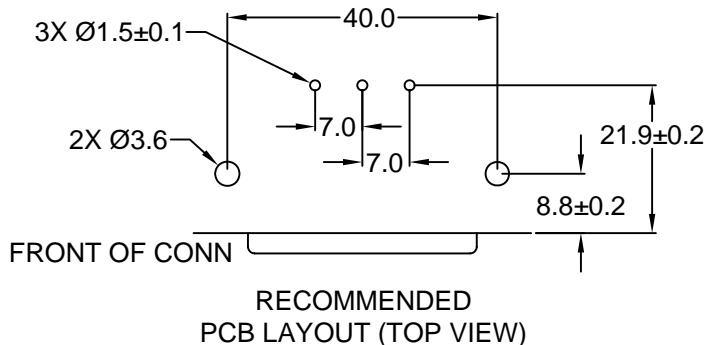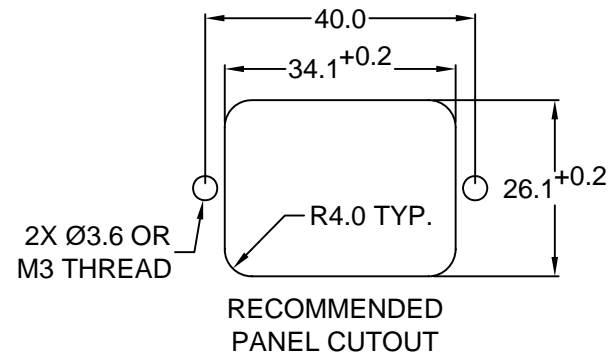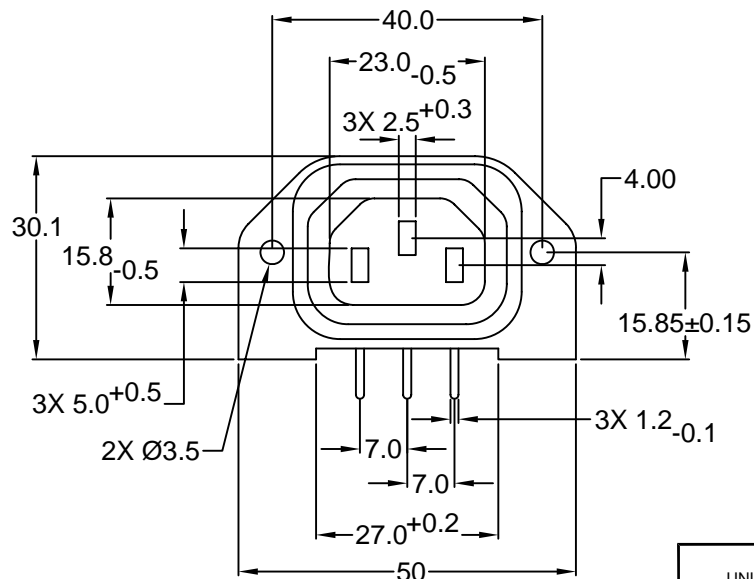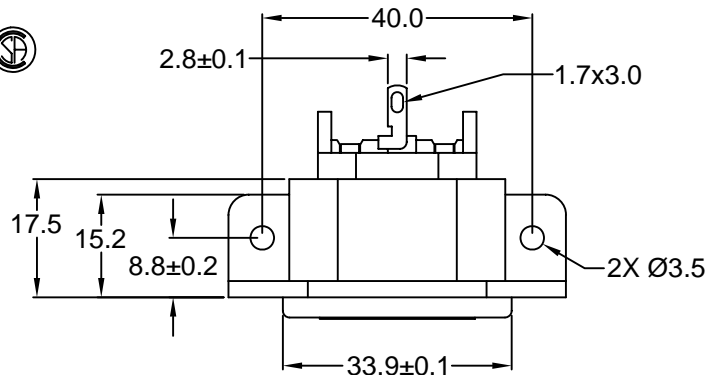

REVISIONS	CHANGE	CHNG	CHK	APPR
	REVISED / UPDATED	GO	TD	PB
	DATE	12/05/01		
REV	A			

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20
DRAWN BY	AH
CHECK BY	
APPR BY	SS
DATE:	3/25/98
DATE:	
DATE:	11/9/98

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C13 APPL. OUTLET; PCB TERMINALS, SIDE FLANGE

43R65

PART #: 43R65

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1

REV: A