

Insulator: Thermoplastic, black, UL-94V-0 rated.
Solder Terminals: Brass, Tin plated.

ELECTRICAL SPECIFICATIONS:

Rated current: 10A

Rated voltage: 250VAC

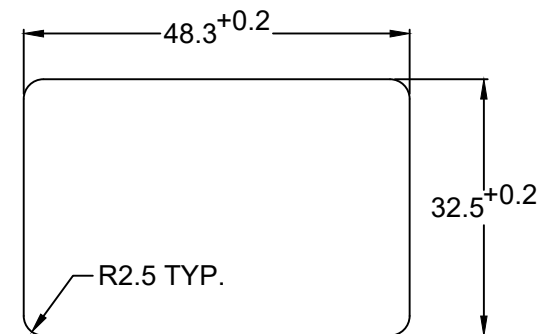
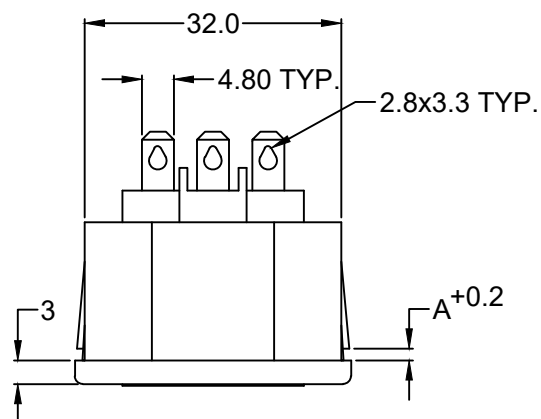
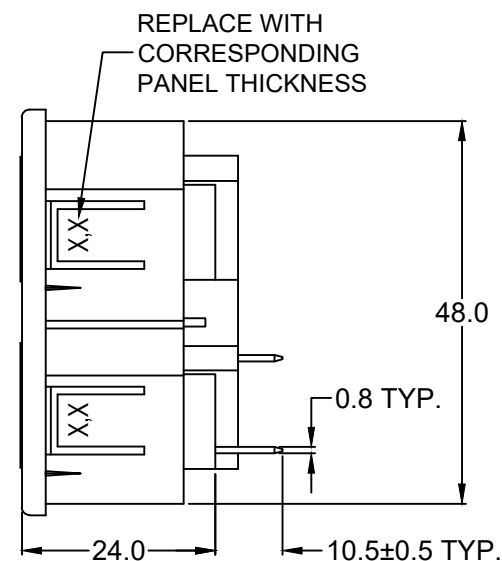
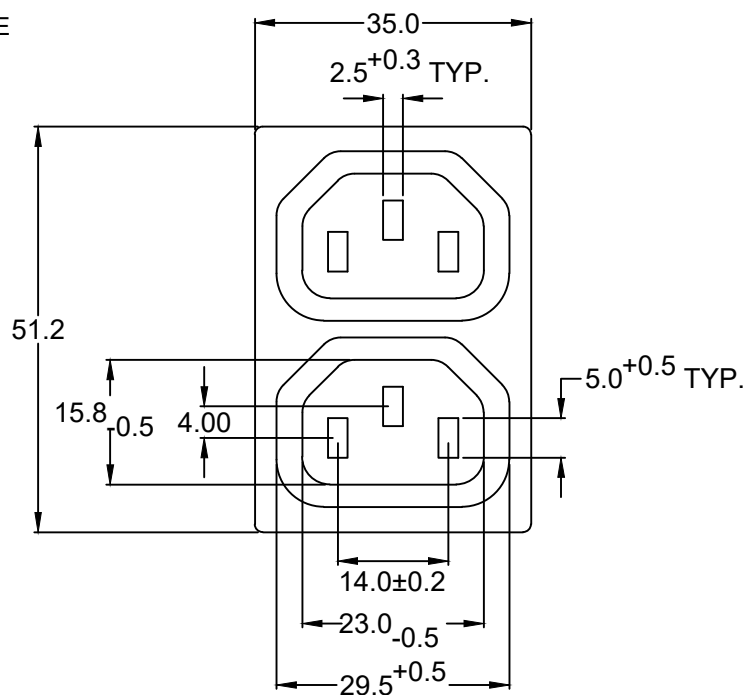


Rated current: 15A

Rated voltage: 250VAC



NOTE: 44R02-2131-XXX IS P-LOCK COMPATIBLE

RECOMMENDED
PANEL CUTOUT

P/N	A	MAX. PANEL THICKNESS
44R02-3131-100-PL	1.0	1.0
44R02-3131-120-PL	1.2	1.2
44R02-3131-150-PL	1.5	1.5
44R02-3131-170-PL	1.7	1.7
44R02-3131-200-PL	2.0	2.0
44R02-3131-250-PL	2.5	2.5

ADDITIONAL PANEL THICKNESS
AVAILABLE ON REQUEST

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X	±	1
X.X	±	0.4
X.XX	±	0.20

DRAWN BY	PE
----------	----

CHECK BY	
-------------	--

DATE: 6/1/22

DATE:

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 2 GANG IEC 60320 C13 STRIP APPLIANCE
OUTLET: SNAP-IN, 4.8 Q.C. TERMINAL

PART # 44R02-2131-XXX

PART #:

SIZE: A

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

SHEET
1 of 1

REV: