

MATERIAL AND FINISH:

Insulator: Thermoplastic, black, UL-94V-0 rated.

Solder Terminals: Brass, Tin plated.

ELECTRICAL SPECIFICATIONS:

Rated current: 10A

Rated voltage: 250VAC





Rated current: 15A


Rated voltage: 250VAC





RoHS
COMPLIANT

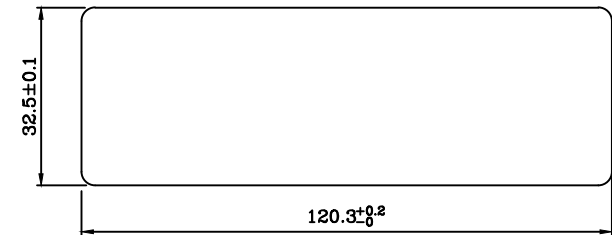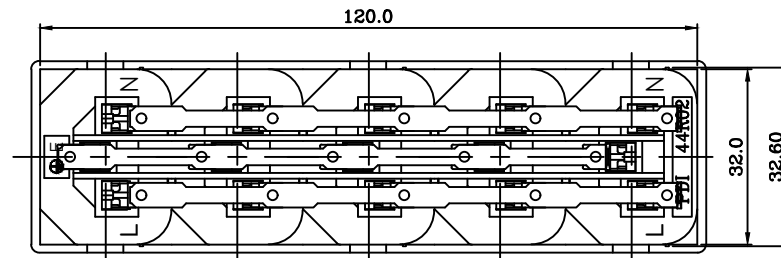

PANEL CUTOUT

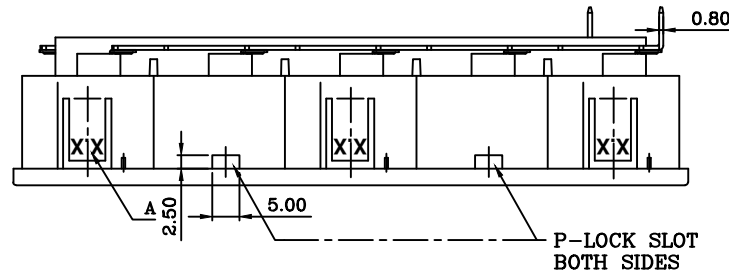

P-LOCK SLOT
BOTH SIDES

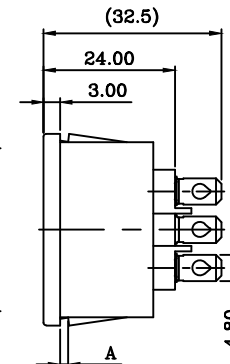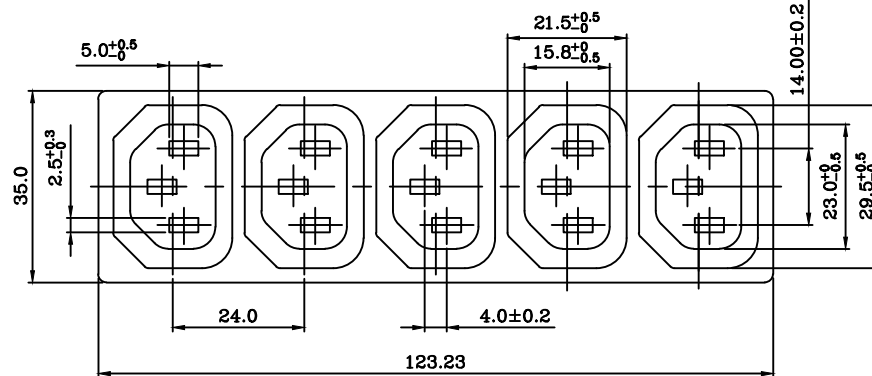

REV	REVISIONS		
	DATE	CHANGE	CHK/CHK APPR

P/N	A	MAX. PANEL THICKNESS
44R02-5131-100-PL	1.0	1.0
44R02-5131-120-PL	1.2	1.2
44R02-5131-150-PL	1.5	1.5
44R02-5131-170-PL	1.7	1.7
44R02-5131-200-PL	2.0	2.0
44R02-5131-250-PL	2.5	2.5

ADDITIONAL PANEL THICKNESS
AVAILABLE ON REQUEST

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	PB	DATE:	6/1/22
CHECK BY	-	DATE:	-
APPR BY		DATE:	

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 5 GANG IEC 60320 C13 APPLIANCE OUTLET

SNAP IN; 4.8MM Q.C. TERMINALS; P-LOCK COMPATIBLE

44R02-5131-XXX-PL		SHEET 1 of 1	
PART #:	SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY	REV: -
SCALE: NTS			