MATERIAL AND FINISH:
Insulator: Thermoplastic, black, UL-94V-0 rated.
Solder Terminals: Brass, Tin plated.

ELECTRICAL SPECIFICATIONS:
Rated current: 10A
Rated voltage: 250VAC

Rated current: 15A
Rated voltage: 250VAC

RoHS COMPLIANT

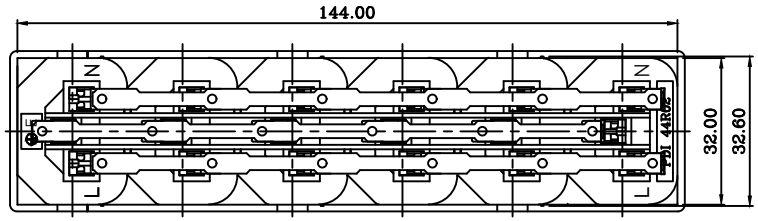

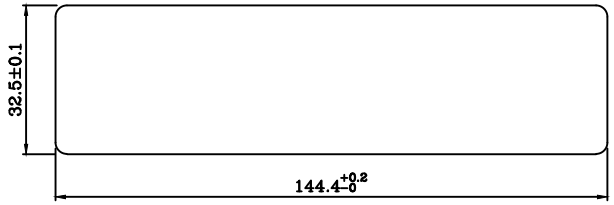

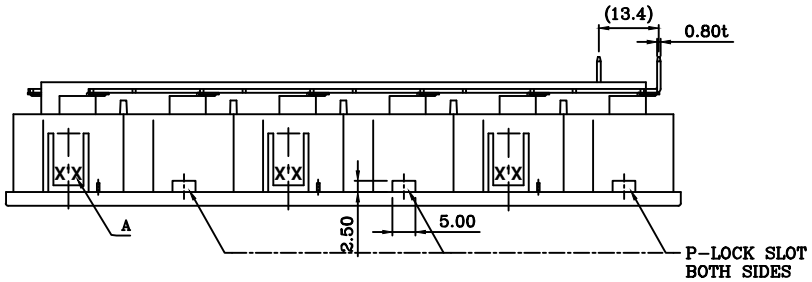

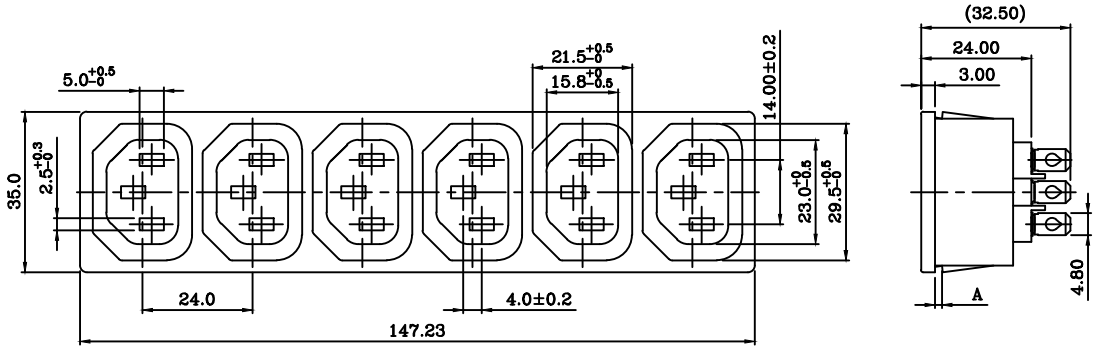

P/N	A	MAX. PANEL THICKNESS
44R02-6131-100-PL	1.0	1.0
44R02-6131-120-PL	1.2	1.2
44R02-6131-150-PL	1.5	1.5
44R02-6131-170-PL	1.7	1.7
44R02-6131-200-PL	2.0	2.0
44R02-6131-250-PL	2.5	2.5

ADDITIONAL PANEL THICKNESS AVAILABLE ON REQUEST

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	PB	DATE:	6/1/22
CHECK BY	-	DATE:	-
APPR BY		DATE:	

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 6 GANG IEC 60320 C13 APPLIANCE OUTLET
SNAP IN; 4.8MM Q.C. TERMINALS; P-LOCK COMPATIBLE

PART #: 44R02-6131-XXX-PL
SHEET 1 of 1
SIZE: A
ALL DIMENSIONS FOR REFERENCE ONLY
SCALE: NTS
REV: -

REVISIONS

REV	DATE	CHANGE	CHNG	CHCK	APPR