

MATERIAL AND FINISH:
Insulator: Polycarbonate,
UL-94V-0 rated
Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:
Inlet Current rating: 10 A
Fuse Holder Current rating: 5A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min.
at 500 VDC
Dielectric withstanding voltage: 2000
VAC for one minute

ORDERING CODE:

42R40-3 $\frac{2}{1}$ $\frac{2}{2}$ - $\frac{3}{3}$

1) COLOR

- 1 = BLACK
2 = GRAY

2) ELECTRICAL CIRCUIT
CONFIGURATION

1 = 10A 250V 70°C
2+GROUND, 1 FUSE



2 = 10A 250V 70°C
2+GROUND, 2 FUSE



4 = 10A 250V 120°C
2+GROUND, 2 FUSE



5 = 10A 250V 70°C
2 POLE, 1 FUSE



6 = 10A 250V 70°C
2 POLE, 2 FUSE




3) PANEL THICKNESS

P/N	A	MAX. PANEL THICKNESS
42R40-3X2X-150	1.5	1.5
42R40-3X2X-200	2.0	2.0
42R40-3X2X-250	2.5	2.5



ADDITIONAL PANEL THICKNESS
AVAILABLE ON REQUEST

RoHS
COMPLIANT

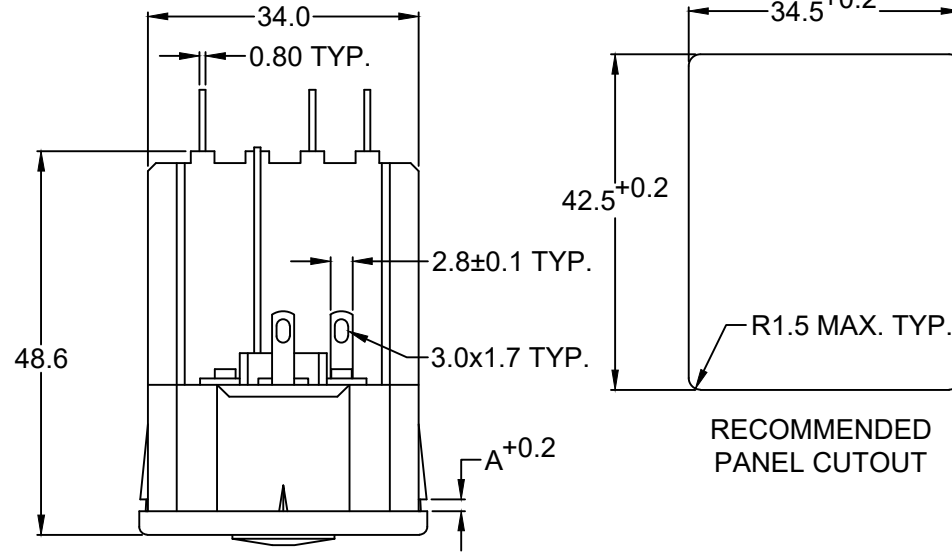

RECOMMENDED
PANEL CUTOUT

SCHEMATICS

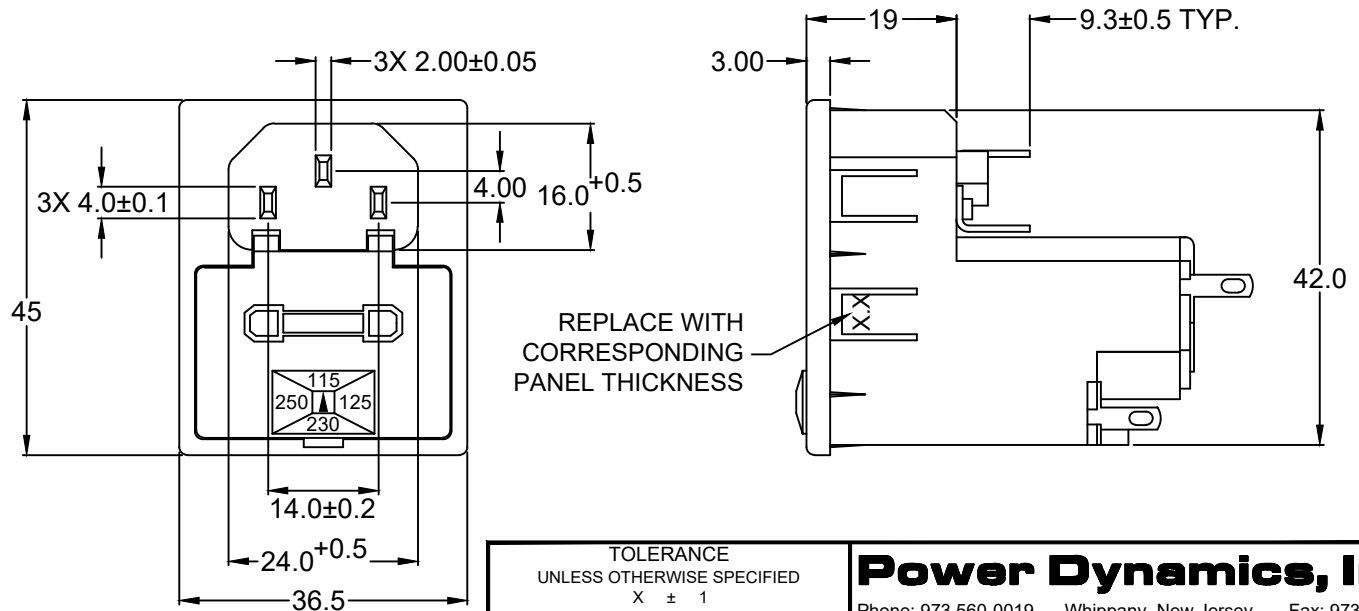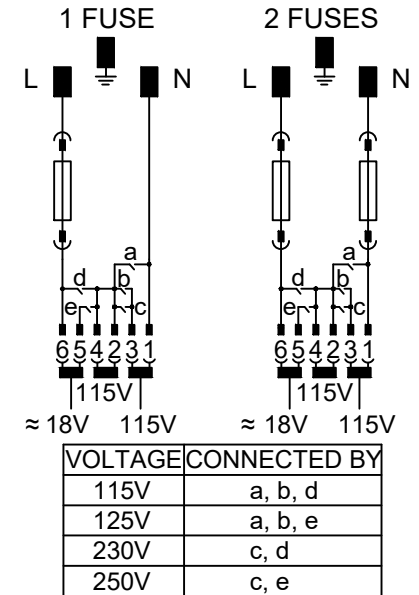

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 COMBINATION FUSE HOLDER
APPL. INLET; SOLDER TERMINALS; SNAP-IN

42R40-3X2X-XXX

SHEET
1 of 1

PART #:

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: A

REV	REVISIONS		
	DATE	CHANGE	BY
	1/6/22	CHNG	CHK APPR
	A	REVISED CURRENT RATINGS	PB