

MATERIAL AND FINISH:
Insulator: Polycarbonate,
UL-94V-0 rated
Contacts: Brass, Nickel plated



ORDERING CODE:

42R41- 2 - 4
1 2 3 4

1) SNAP-IN MOUNT
3 = WITHOUT LAMP
8 = WITH NEON LAMP

2) COLOR
1 = BLACK
2 = GRAY

3) ELECTRICAL CIRCUIT
CONFIGURATION

3 = 10A 250V 70°C
2+GROUND, 1 FUSE

4 = 10A 250V 70°C
2+GROUND, 2 FUSE

7 = 10A 250V 120°C
2+GROUND, 1 FUSE




8 = 10A 250V 120°C
2+GROUND, 2 FUSE

11 = 10A 250V 70°C
2 POLE, 1 FUSE



12 = 10A 250V 70°C
2 POLE, 2 FUSE

4) PANEL THICKNESS

ELECTRICAL SPECIFICATIONS:
Inlet Current rating: 10 A
Fuse Holder Current rating:
5A 6.3A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min.
at 500 VDC
Dielectric withstanding voltage: 2000
VAC for one minute

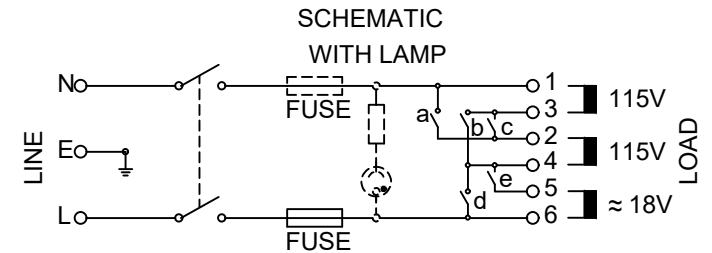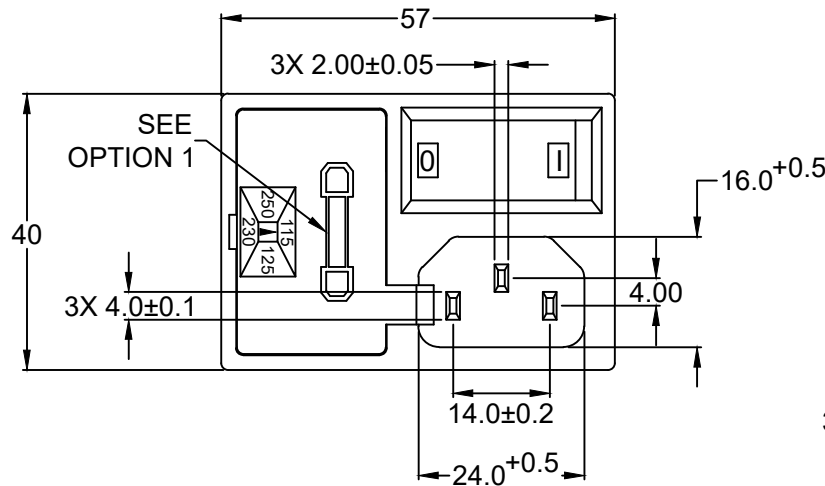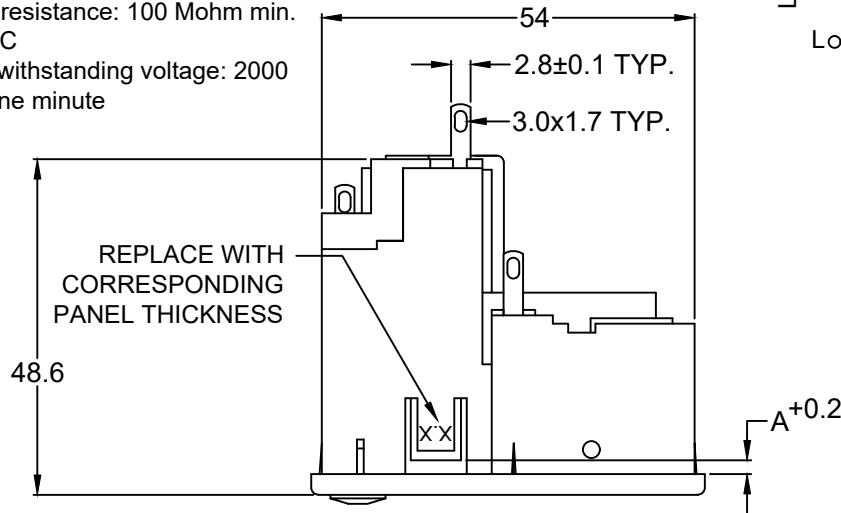

VOLTAGE	CONNECTED BY
115V	a, b, d
125V	a, b, e
230V	c, d
250V	c, e

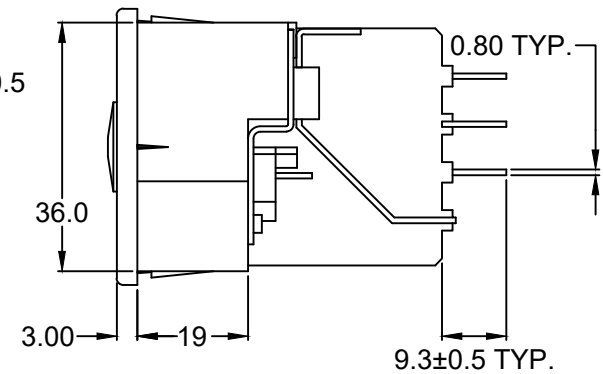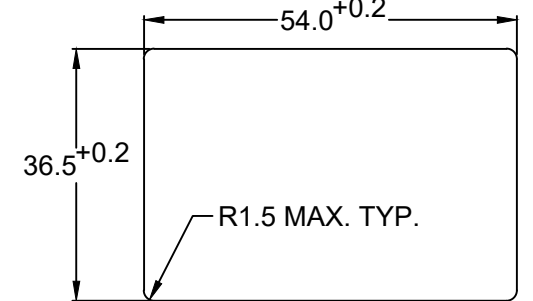

REVISIONS

CHANGE

REV DATE

A 7/27/05
B 1/10/22
PB REMOVED VDE
PB REVISED CURRENT RATINGS
CHNG CHECK APPR

P/N	A	MAX. PANEL THICKNESS
42R41-XX2X-150	1.5	1.5
42R41-XX2X-200	2.0	2.0
42R41-XX2X-250	2.5	2.5

ADDITIONAL PANEL THICKNESS AND ONE
POLE SWITCH AVAILABLE ON REQUEST

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY GQ
CHECK BY TD
APPR BY PB
DATE: 09/27/01
DATE: 10/04/01
DATE: 10/04/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET, VOLTAGE SELECTOR,
SWITCH, FUSE HOLDER; SOLDER TERMINALS; SNAP-IN

PART #: **42R41-XX2X-XXX**

SIZE: A
SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

SHEET
1 of 1

REV: B