

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Inlet Current rating: 10 A

Fuse Holder Current rating: 6A 10A

Voltage rating: 250 VAC

Insulation resistance:

100 Mohm min. at 500 VDC

Dielectric withstanding voltage:

2000 VAC for one minute

ORDERING CODE:

42R32-2
1 2 3

1) COLOR

1 = BLACK

2 = GRAY

2) TERMINAL OPTIONS

1 = .187(4.8)

2 = .250(6.3)

3) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C

2+GROUND



2 = 10A 250V 120°C

2+GROUND







4 = 10A 250V 70°C

2 POLE




REVISIONS

REV	DATE	CHANGE	CHK	CHK	APPR
A	12/14/21	REVISED CURRENT RATING		PB	

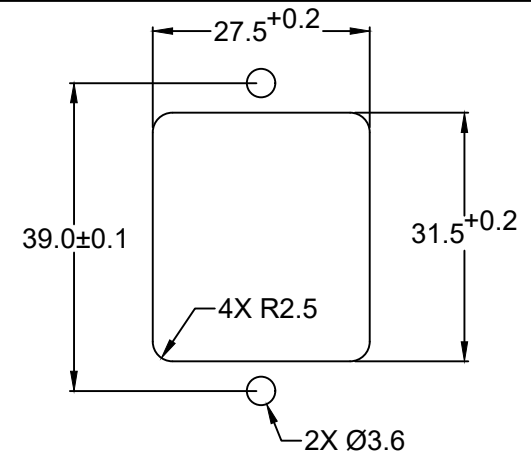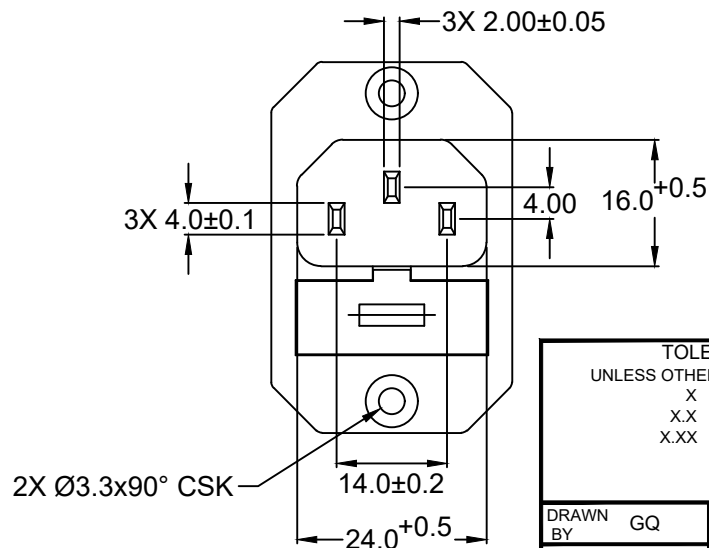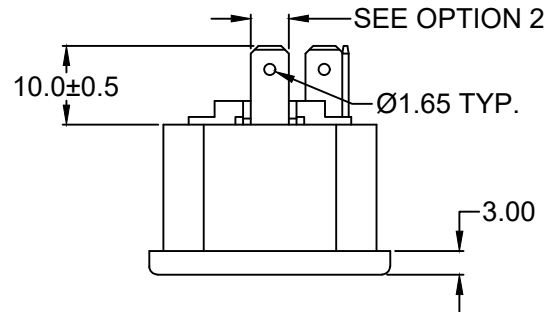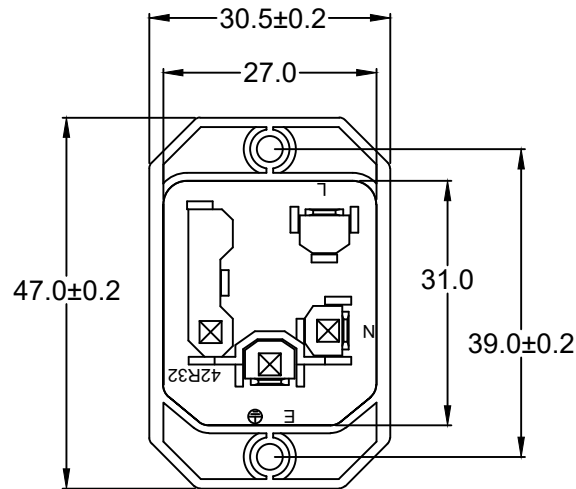

RECOMMENDED
PANEL CUTOUT

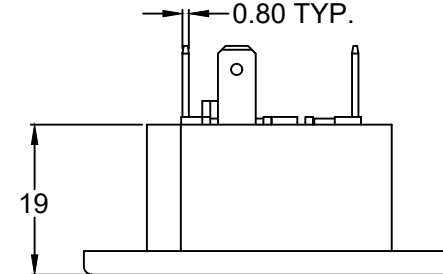

TOLERANCE UNLESS OTHERWISE SPECIFIED

X	± 1
X.X	± 0.4
X.XX	± 0.20

DRAWN BY	GQ	DATE:	09/09/01
CHECK BY	TD	DATE:	09/09/01
APPR BY	PB	DATE:	09/09/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 SINGLE FUSE HOLDER APPL. INLET;
QUICK CONNECT TERMINALS; CROSS FLANGE

PART #: 42R32-2XXX

SIZE: A
SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

SHEET
1 of 1
REV: A

RoHS
COMPLIANT