

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Inlet Current rating: 10 A  

Fuse Holder Current rating: 6A  10A 

Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:

42R33-1 2
 1 2

1) COLOR

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C

2+GROUND








2 = 10A 250V 120°C

2+GROUND



4 = 10A 250V 70°C

2 POLE

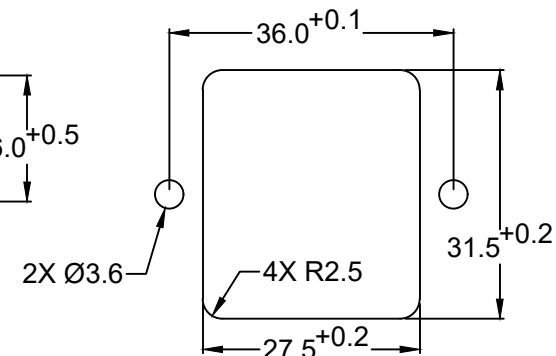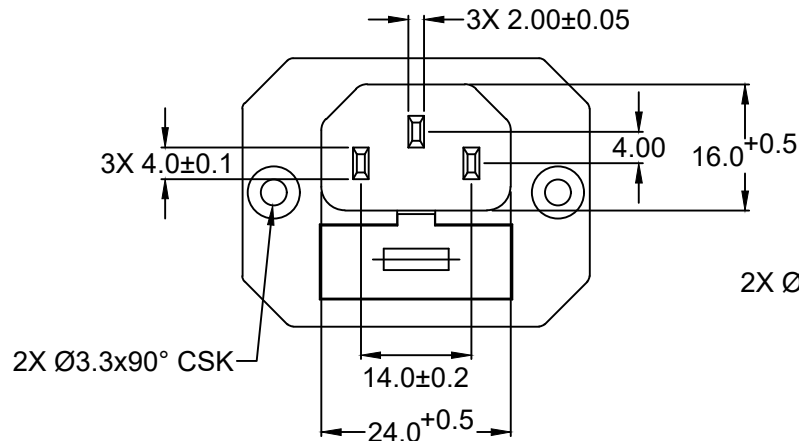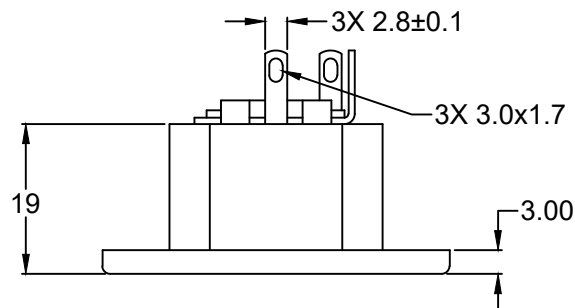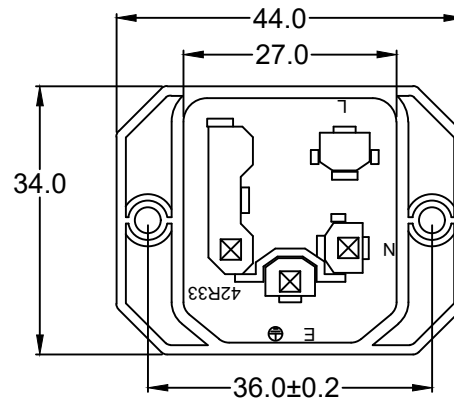

RECOMMENDED
PANEL CUTOUT

REVISIONS

REV	DATE	CHANGE	CHK	CHK	APPR
A	12/14/21	REVISED CURRENT RATING	PB		

RoHS
COMPLIANT

TOLERANCE

UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	GQ	DATE:	09/12/01
CHECK BY	TD	DATE:	09/12/01
APPR BY	PB	DATE:	09/12/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 SINGLE FUSE HOLDER APPL. IN-
LET; SOLDER TERMINALS; SIDE FLANGE

PART #:	42R33-1X2X	SHEET	1 of 1
SIZE:	A	ALL DIMENSIONS FOR REFERENCE ONLY	REV: A
SCALE:	NTS	DIMENSIONS ARE IN MILLIMETERS	