

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Inlet Current rating: 10 A

Fuse Holder Current rating: 6A 10A

Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage:

2000 VAC for one minute

ORDERING CODE:

42R33-2 2 1 2

1) COLOR

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION






1 = 10A 250V 70°C
2+GROUND



2 = 10A 250V 120°C
2+GROUND



4 = 10A 250V 70°C
2 POLE

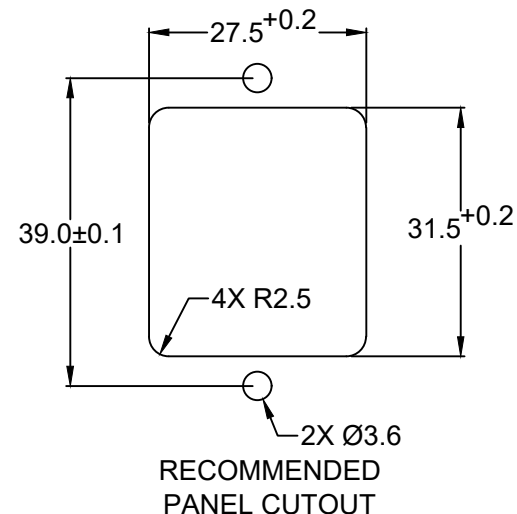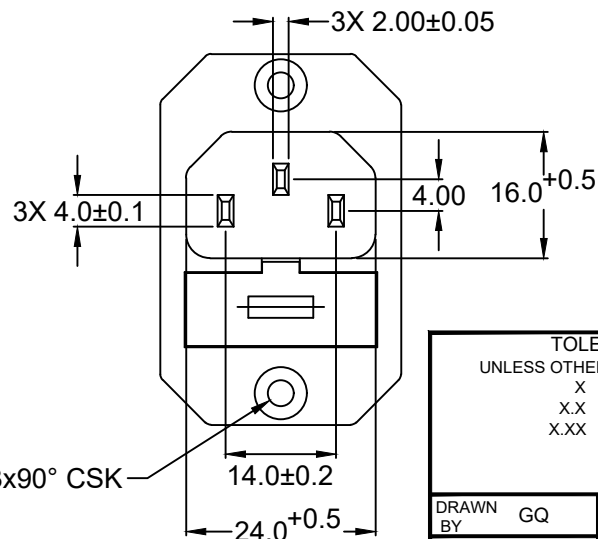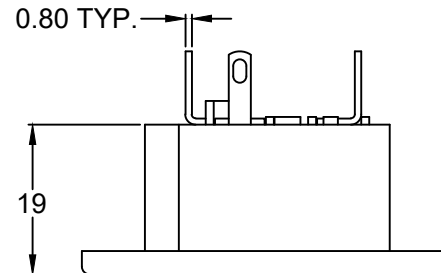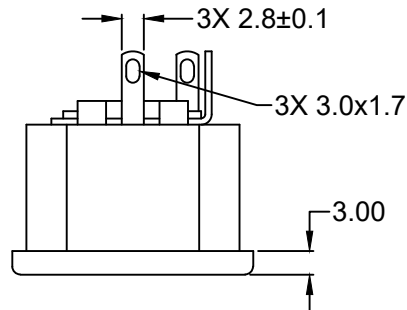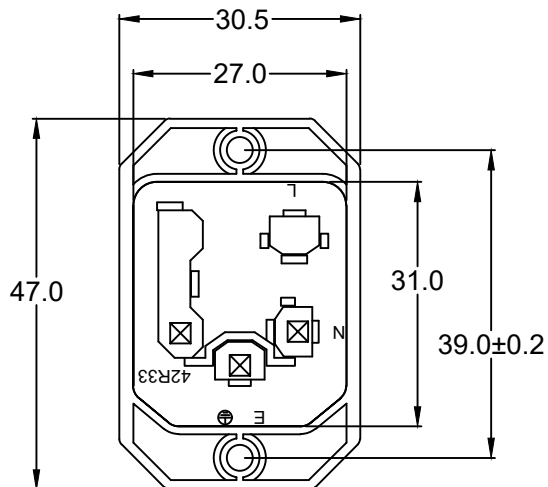

RoHS
COMPLIANT

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 SINGLE FUSE HOLDER APPL. IN-
LET; SOLDER TERMINALS; CROSS FLANGE

DRAWN BY GQ
CHECK BY TD
APPR BY PB
DATE: 09/12/01
DATE: 09/12/01
DATE: 09/12/01

PART #: 42R33-2X2X

SHEET
1 of 1

SIZE: A
SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: A

REVISIONS

REV	DATE	CHANGE	CHNG	CHECK	APPR
A	12/15/21	REVISED CURRENT RATING	PB		