

Contacts: Copper, Tin plated

Inlet Current rating: 10 A

Fuse Holder Current rating: 6A 6.3A

Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

42R34-1 $\frac{\quad}{1}$ 2 $\frac{\quad}{2}$

- 1) COLOR

1 = BLACK

2 = GRAY

- ## 2) ELECTRICAL CIRCUIT CONFIGURATION




1 = 10A 250V 70°C
2+GROUND



2 = 10A 250V 120°C
2+GROUND



4 = 10A 250V 70°C
2 POLE

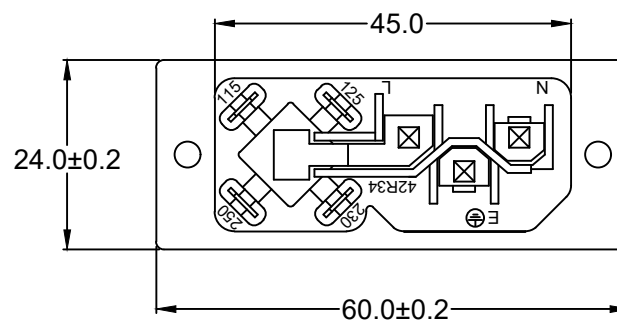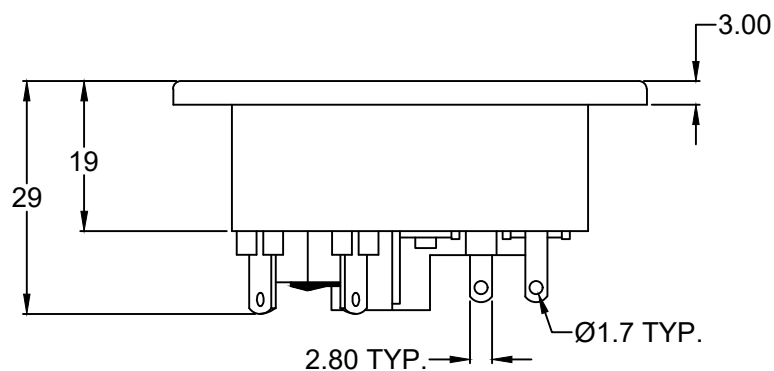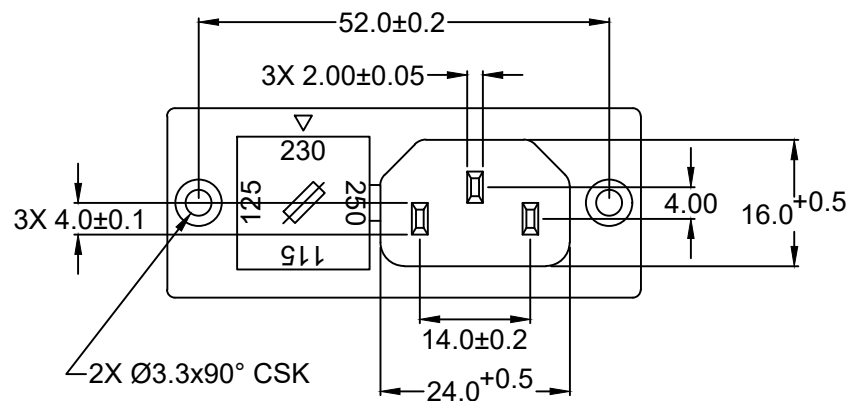

RoHS
COMPLIANT

TOLERANCE		
UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET AND COMBINATION
FUSE HOLDER: SOLDER TERMINALS: SCREW

PART # 42R34-1X2X

SHEET
1 of 1

SIZE: A

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: A

DRAWN BY	GQ	DATE:	09/13/07
CHECK BY	TD	DATE:	09/18/07
APPR BY	PB	DATE:	09/18/07

Technical drawing of a U-bolt with the following dimensions and features:

- Overall length: 52 ± 0.1
- Length from end to start of thread: $45.5 + 0.2$
- Thread specification: $2 \times \text{Ø}3.6$
- Radius of fillet: $R2.5 \text{ TYP.}$
- Thread length: $20 + 0.2$

RECOMMENDED
PANEL CUTOUT

REVISIONS				
REV	DATE	CHANGE	CHNG	CHK APPR
A	12/15/21	REVISED CURRENT RATING	PB	