

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Inlet Current rating: 10 A 

Fuse Holder Current rating: 6A 

Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:

42R38-1 $\frac{2}{1}$ $\frac{2}{2}$

1) COLOR

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION





1 = 10A 250V 70°C
2+GROUND




2 = 10A 250V 120°C
2+GROUND



4 = 10A 250V 70°C
2 POLE

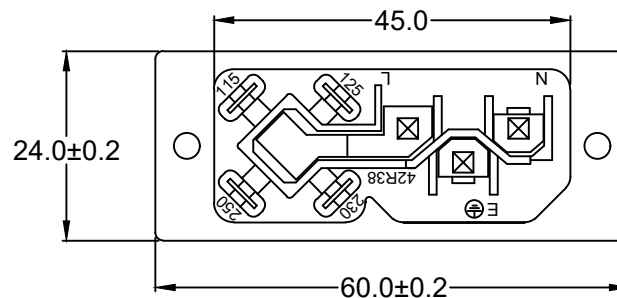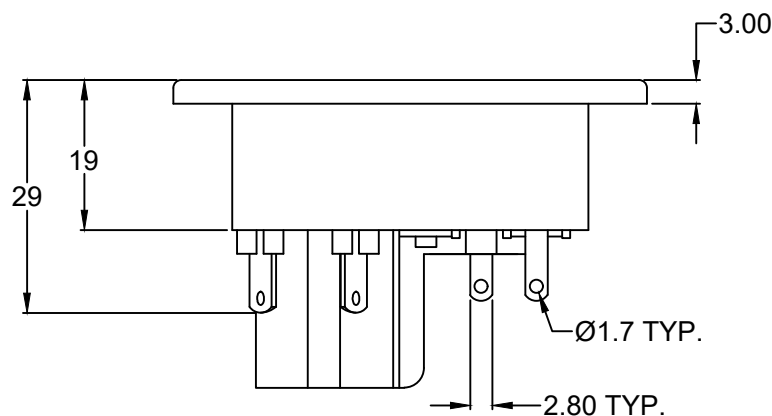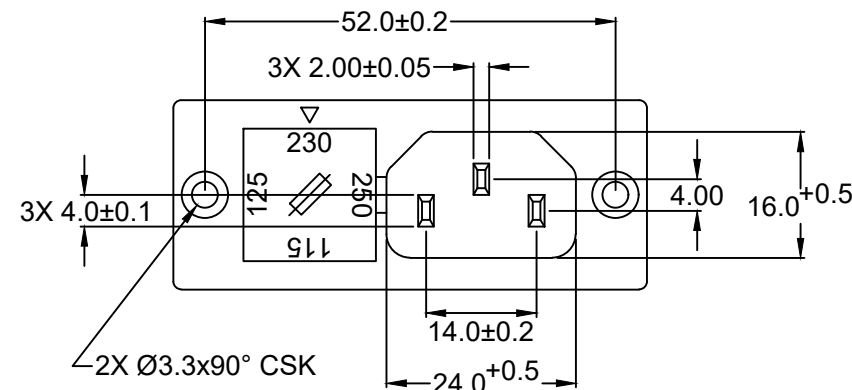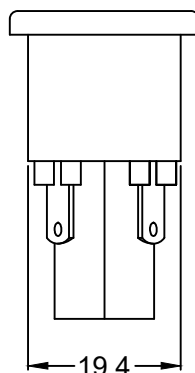

RoHS
COMPLIANT

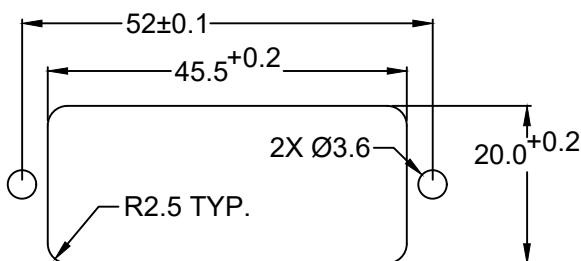

RECOMMENDED
PANEL CUTOUT

TOLERANCE

UNLESS OTHERWISE SPECIFIED

X ± 1

X.X ± 0.4

X.XX ± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET AND COMBINATION
FUSE HOLDER; SOLDER TERMINALS; SCREW

PART #: **42R38-1X2X**

SHEET
1 of 1

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: A

REVISIONS

REV	DATE	CHANGE	CHNG	CHECK	APPR
A	1/11/22	REVISED CURRENT RATINGS	PB		