





**MATERIAL AND FINISH:**

Insulator: PC (Polycarbonate), color black, UL-94V-0 rated  
 Contacts: Brass, Nickel plated

**ELECTRICAL SPECIFICATIONS:**


Inlet Current rating: 10 A   
 Fuse Holder Current rating: 3A   
 Voltage rating: 250 VAC  
 Insulation resistance: 100 Mohm min. at 500 VDC  
 Dielectric withstanding voltage: 2000 VAC for one minute

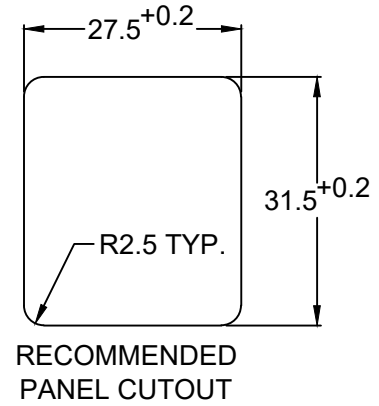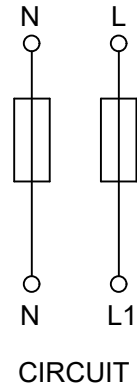


**ORDERING CODE:**


42R44-314 - - -  
 1 2

**1) ELECTRICAL CIRCUIT CONFIGURATION**

1 = 10A 250V 70°C  
 2+GROUND 2 FUSE 

2 = 10A 250V 120°C  
 2+GROUND 2 FUSE 

**2) PANEL THICKNESS**

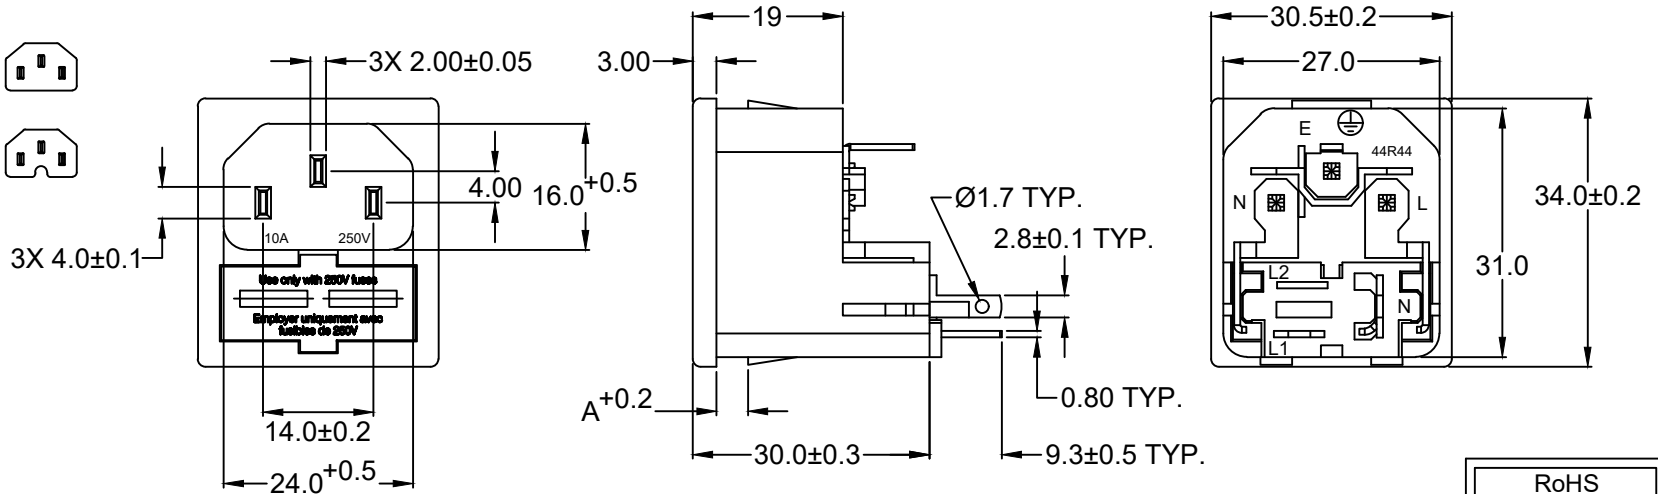

RoHS COMPLIANT

REVISIONS	CHANGE	CHK	CHK	APPR
	DATE	9/7/17		
	REV	A	B	
	UPDATE CURRENT RATINGS & APPROVALS		PB	
	REVISED CURRENT RATINGS		PB	

P/N	A	MAX. PANEL THICKNESS
42R44-314X-150	1.5	1.5
42R44-314X-200	2.0	2.0
42R44-314X-250	2.5	2.5

ADDITIONAL PANEL THICKNESS AVAILABLE ON REQUEST

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20
DRAWN BY	GQ
CHECK BY	TD
APPR BY	PB
DATE:	11/27/01
DATE:	12/04/01
DATE:	12/04/01

**Power Dynamics, Inc.**  
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET, FUSE HOLDER, SOLDER TERMINALS; SNAP-IN

PART #: **42R44-314X-XXX**

SIZE: A SCALE: NTS ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1 REV: B