

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Nylon, color black, UL-94V-2 rated

Contacts: Bronze, Nickel plated

Terminals: Bronze, Tin plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A

Voltage rating: 250 VAC



Current rating: 15 A

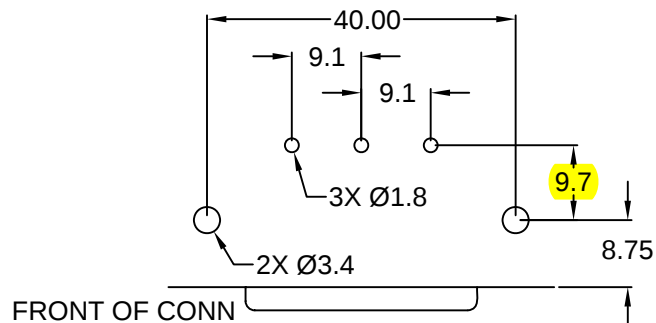
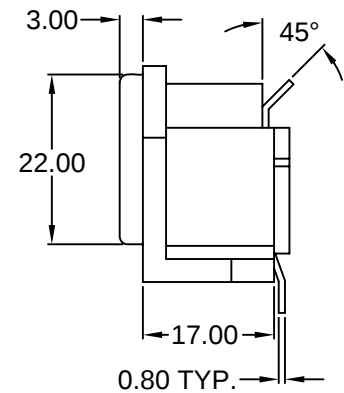
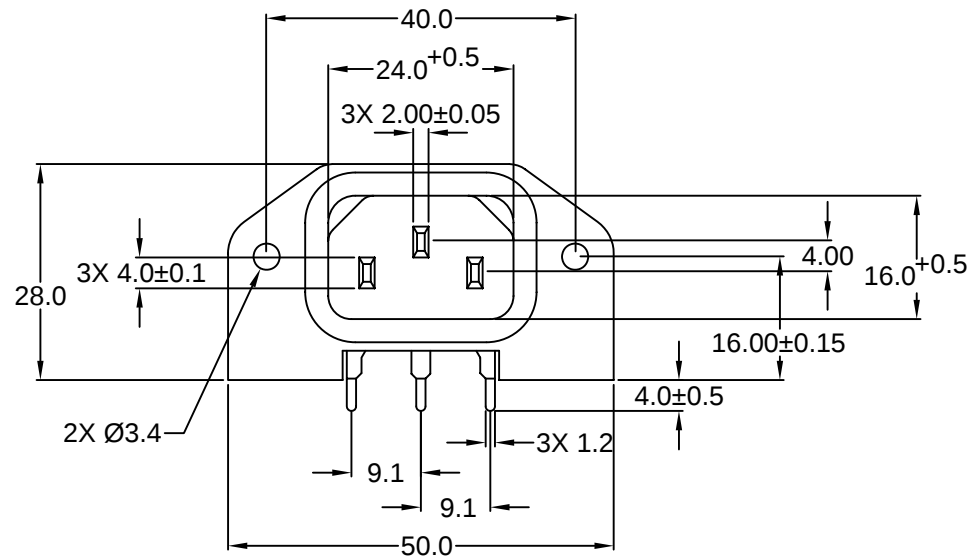
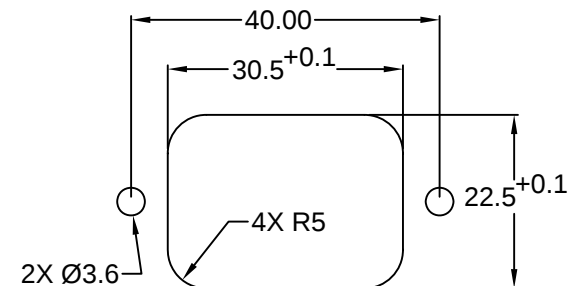
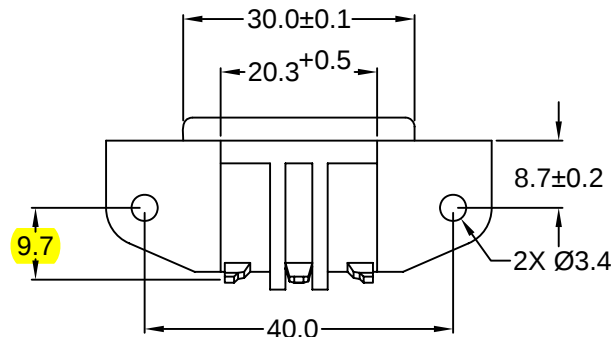
Voltage rating: 250 VAC



Contact resistance: 30 mohm max.

Insulation resistance: 1000 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

RECOMMENDED
PCB LAYOUT (TOP VIEW)RECOMMENDED
PANEL CUTOUT

REVISIONS

REV	DATE	CHANGE	CHNG	CHK	APPR
A	11/20/01	REVISED / UPDATED	GQ	TD	PB

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	SLS	DATE:	8/10/98
CHECK BY	LH	DATE:	10/16/98
APPR BY	AH	DATE:	10/16/98

RoHS
COMPLIANT**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C14 APPL. INLET; PCB TERMINALS,
9.7mm FOOTPRINT, SIDE FLANGE

PD-42R65-9.7

SHEET
1 of 1PART #:
SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: A