

6

5









4

3

2

1



CABLE SPECIFICATIONS

DESCRIPTION	COLOR CODE	NOMINAL O.D.	OVERALL RATING	COLOR	APPROVAL
3x1.0mm ² H05VV-F	INT'L	7.1	10A 250V	BLACK	       


NOTES:

1. Cord set is supplied with a 13A fuse

**RoHS
COMPLIANT**

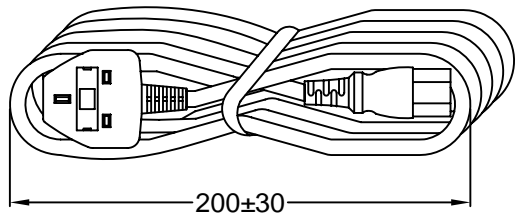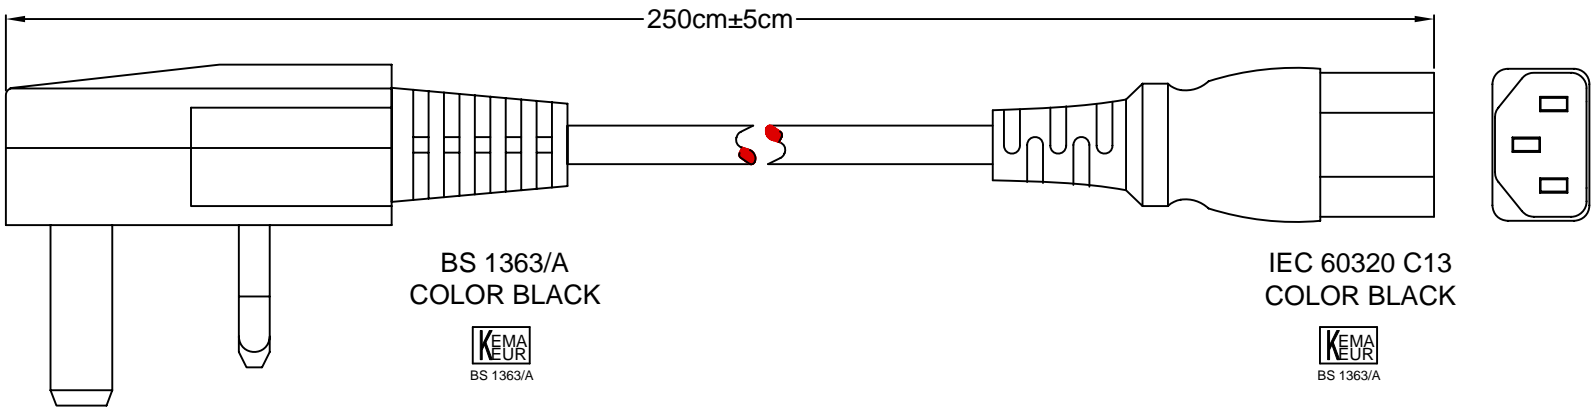

HANKING DETAIL

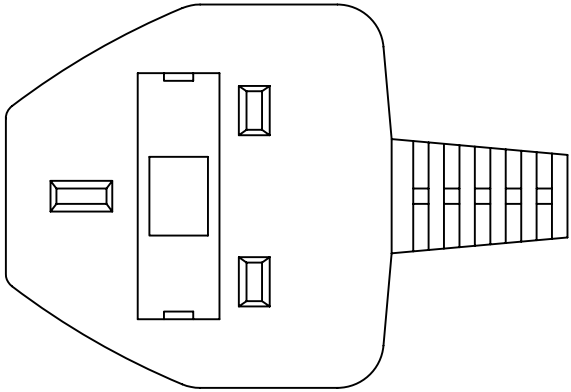

REV	DATE	CHANGE	CHNG		CHKD		APPR	
			SS	TD	SS	TD	PJ	SS
A	4/89	CHANGED PLUG						
B	3/14/00	UPDATED DRAWING	PB	TD	PB	TD	JJ	SS
C	4/20/00	ADDED PACKING SPEC.	PB	TD	PB	TD	JJ	SS
D	5/25/00	ADD HANKING SPEC.						
E	11/14/00	UPDATED APPROVALS	PB	TD	PB	TD	JJ	SS
F	12/10/01	REVISED / UPDATED						
G	8/3/07	UPDATED APPROVALS						

TOLERANCE IN MM
UNLESS OTHERWISE SPECIFIED
> 1000 ± 50
<= 1000 ± 30
STRIPPED LENGTH ± 2

Power Dynamics, Inc.

Phone: 973-560-0019 Whippany, New Jersey Fax: 973-560-0076

PART: BRITISH FUSED CORD SET 250cm LONG
BS 1363 TO IEC 60320 C13, 13A FUSE

DRAWN BY	AH	DATE:	8/25/98
CHECK BY	TD	DATE:	4/20/99
APPR BY	PJ	DATE:	4/20/99

PART #:	14012	SHEET	1 of 1
SIZE:	A	ALL DIMENSIONS FOR REFERENCE ONLY	REV: G
SCALE:	NTS	DIMENSIONS ARE IN MILLIMETERS	