

6

5

4


3

2


1

CABLE SPECIFICATIONS

DESCRIPTION	COLOR CODE	NOMINAL O.D.	OVERALL RATING	COLOR	APPROVAL
3x1.0mm ² H05VV-F	INT'L	7.1	5A 250V	BLACK	

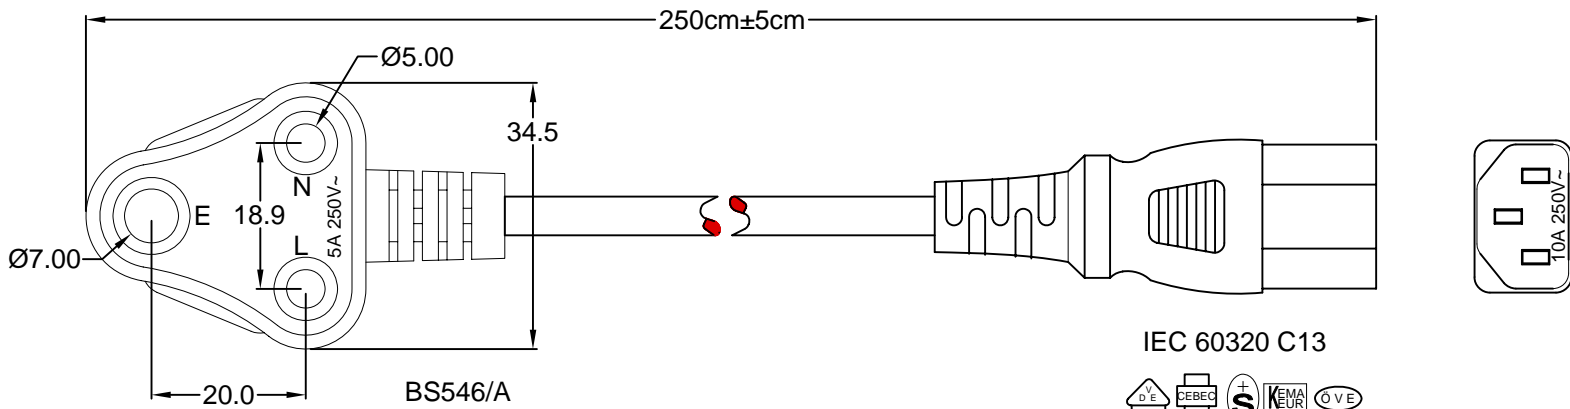

IEC 60320 C13

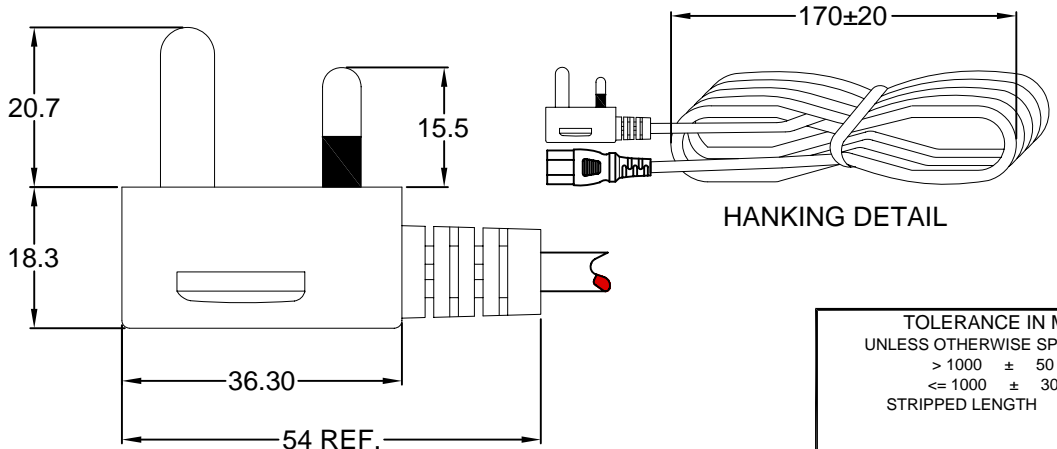

HANKING DETAIL

**RoHS
COMPLIANT**

REV	DATE	CHANGE	CHNG		CHKD		APPR	
			PB	TD	PB	TD	PB	TD
A	4/20/00	REVISED / REDRAWN	PB	TD	JJ	TD		
B	10/17/01	REVISED & UPDATED	TD	PB	PB	PB		
C	10/26/01	ADD PLUG 7 CON. DIM	TD	PB	PB	PB		
D	12/1/01	REVISED / UPDATED	GQ	PB	PB	PB		
E	4/08/02	O. RATING WAS 10A	TD	PB				

TOLERANCE IN MM
UNLESS OTHERWISE SPECIFIED
> 1000 ± 50
<= 1000 ± 30
STRIPPED LENGTH ± 2

Power Dynamics, Inc.
Phone: 973-560-0019 Whippany, New Jersey Fax: 973-560-0076

PART: INDIA / SOUTH AFRICA CORD SET;
250cm LONG; BS546/A TO IEC 60320 C13

DRAWN BY	TD	DATE:	4/30/99
CHECK BY	PJ	DATE:	4/30/99
APPR BY	SS	DATE:	4/30/99

PART #:	16012	SHEET	1 of 1
SIZE:	A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV: E
SCALE:	NTS		