

6

5


4

3

2


1

CABLE SPECIFICATIONS

| DESCRIPTION                     | COLOR CODE | NOMINAL O.D. | OVERALL RATING | COLOR | APPROVAL   |
|---------------------------------|------------|--------------|----------------|-------|--|
| 3x1.0mm <sup>2</sup><br>H05VV-F | INT'L      | 7.1          | 10A 250V       | BLACK |  OFFICE OF THE TECHNICAL<br>REGULATOR - SOUTH AUSTRALIA |

NOTES:

1. Packaging: Bulk packed
2. Line & Neutral pins must be insulated.
3. AS/NZS 3112:2000 compliant

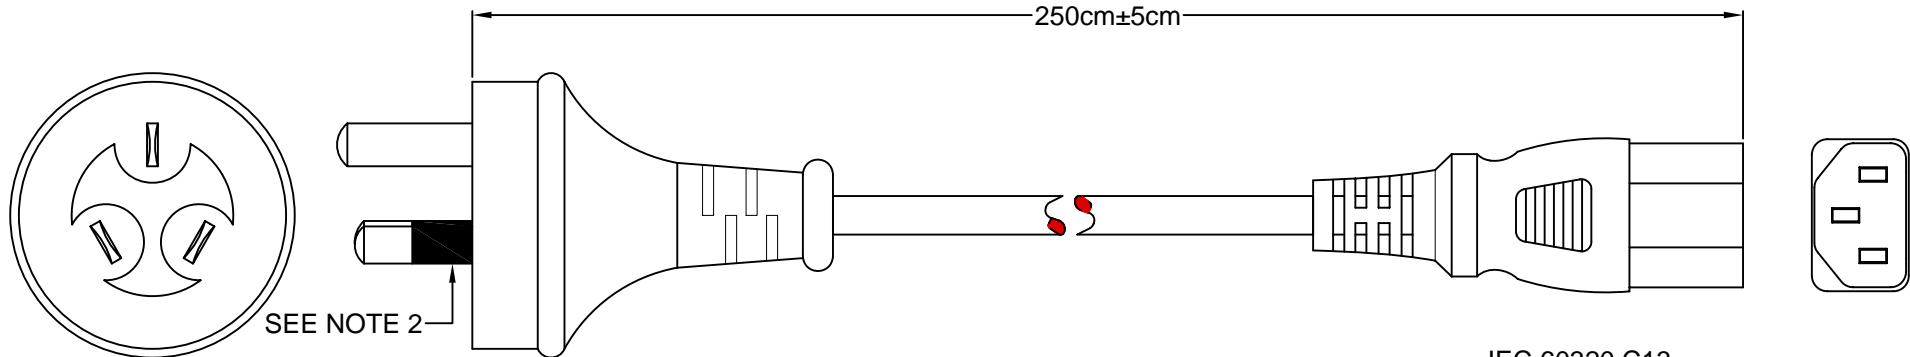

AS 3112  
COLOR BLACK

  
 NSW OFFICE  
OF  
FAIR TRADING

IEC 60320 C13  
COLOR BLACK

  
 NSW OFFICE  
OF  
FAIR TRADING

RoHS  
COMPLIANT

| REV | DATE     | CHANGE                   | CHNG |    | CHKD |    | APPR |    |
|-----|----------|--------------------------|------|----|------|----|------|----|
|     |          |                          | TD   | SS | PB   | TD | SS   | PB |
| A   | 02/00    | UPDATE DWG               | PB   | TD | SS   | PB | TD   | JJ |
| B   | 4/20/00  | ADDED PACKING SPEC.      | PB   | TD | PB   | TD | PB   | PB |
| C   | 5/1/01   | ADDED APPROVALS SYMB.    | PB   | TD | GQ   | PB | PB   | PB |
| D   | 12/10/01 | REVISED / UPDATED        | PB   | TD | PB   | TD | PB   | PB |
| E   | 1/25/05  | UPDATED PLUG & APPROVALS | PB   | TD | PB   | TD | PB   | PB |
| F   | 2/1/06   | ADD NOTE 3               | PB   |    |      |    |      |    |

|  |                |
|--|----------------|
| TOLERANCE IN MM<br>UNLESS OTHERWISE SPECIFIED<br>> 1000 ± 50<br>≤ 1000 ± 30<br>STRIPPED LENGTH ± 2 |                |
| DRAWN BY: SS   | DATE: 10/13/98 |
| CHECK BY: LH   | DATE: 10/13/98 |
| APPR BY: AH  | DATE: 10/13/98 |

**Power Dynamics, Inc.**  
 Phone: 973-560-0019 Whippany, New Jersey Fax: 973-560-0076

PART: AUSTRALIAN CORD SET, AS 3112  
TO IEC 60320 C13

15012

SIZE: A  
SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY  
DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1  
REV: F