

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Thermoplastic, UL-94V-0 rated, color white

Contacts: Brass, Nickel plated

**RoHS
COMPLIANT**

ELECTRICAL SPECIFICATIONS:



Rated current: 13A

Rated voltage: 250VAC


Insulation resistance: 100 Mohm min. at 500VDC

Dielectric withstanding voltage: 2000VAC for one minute

APPROVALS:

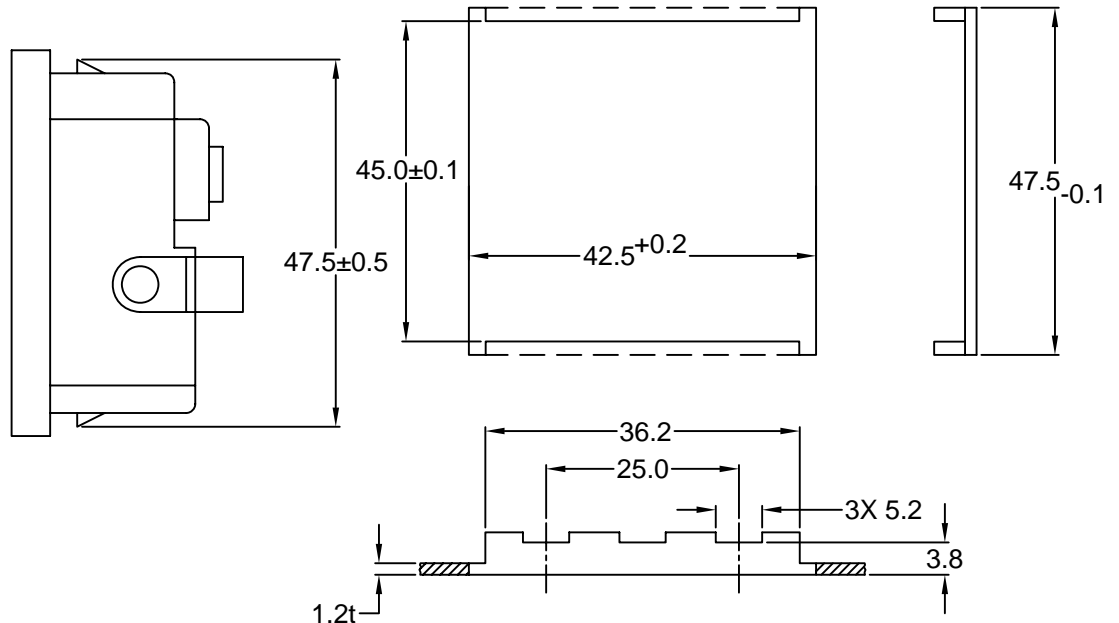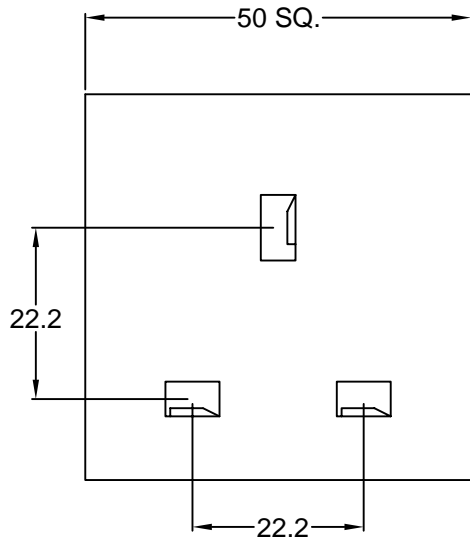

**RECOMMENDED
PANEL CUTOUT**

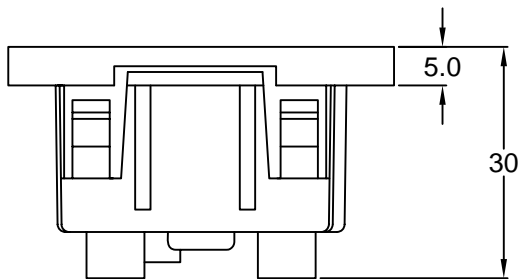

REVISIONS	CHNG	CHK	APPR
	CHANGE	UPDATED	PB
	DATE	8/3/10	
	REV	A	

TOLERANCE UNLESS OTHERWISE SPECIFIED		
X	±	1
X.X	±	0.4
X.XX	±	0.20
DRAWN BY	GQ	DATE: 11/01/01
CHECK BY	TD	DATE: 11/13/01
APPR BY	PB	DATE: 11/13/01

Power Dynamics, Inc.		
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076		
PART: BS-1363 UNITED KINGDOM RECEPTACLE 13A 250VAC		
PART #: PD-16UK		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	
SCALE: NTS	REV: A	

6

5

4

3

2

1