

MATERIAL SPECIFICATIONS:
 Housing: LCP, UL-94V-0 rated
 Contacts: Phosphor bronze, Tin plated

ELECTRICAL SPECIFICATIONS:
 Rated current: UL = 5A / 22 - 26AWG
 cUL = 5A / 22AWG, 3A / 24 - 26AWG
 IEC/EN = 3A
 Rated voltage: UL/cUL = 320V, IEC/EN = 160V

MECHANICAL SPECIFICATIONS:
 Applicable wire: 0.14 ~ 0.34mm² solid
 26-22 AWG solid

Wire strip length: 4.5 - 5.5mm
 Connection type: Cage clamp
 Wire release: with tool
 Solder temperature: 270°C max.






ENVIRONMENTAL SPECIFICATIONS:
 Operating Temperature: -40°C ~ +105°C



SAFETY AGENCY APPROVALS:

STANDARDS: UL1977 / CSA-C22.2 No. 182.3

PACKAGING:
 Tape & Reel; 1500 pcs per reel

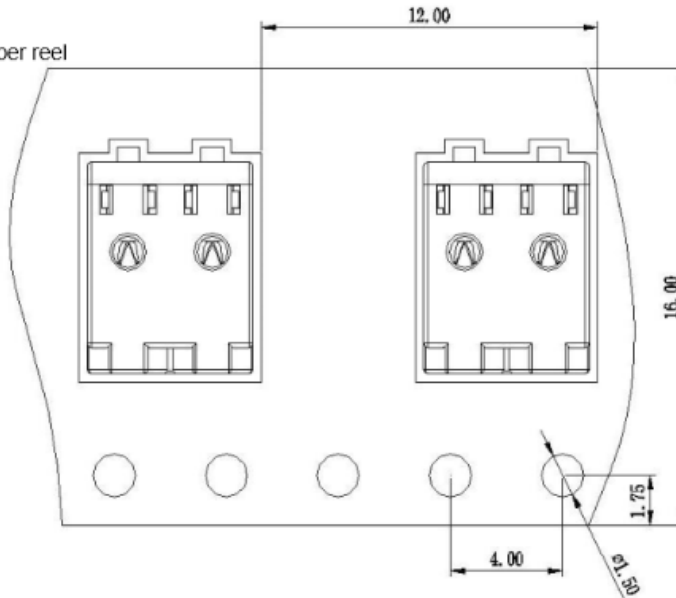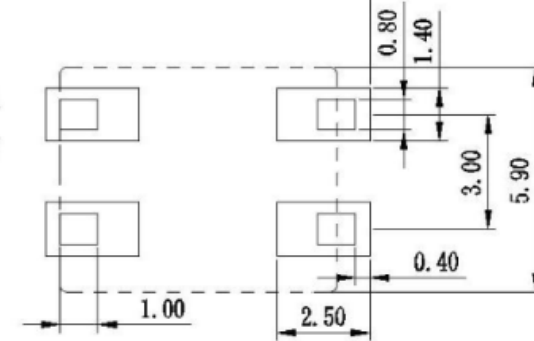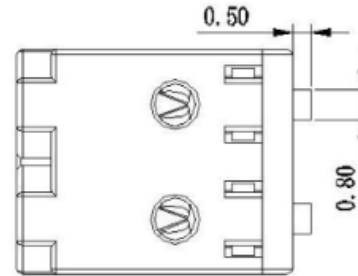

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
XX	± 0.4
XXX	± 0.13
DRAWN BY: PB	DATE: 3/22/18
CHECK BY:	DATE:
APPR BY:	DATE:

Power Dynamics, Inc.	
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076	
PART: 3mm PITCH SMT MICRO TERMINAL BLOCK TWO POLE; FOR LED APPLICATIONS	
PART #: PD-LTB3-2P	
MC: B07A-2P	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS
SCALE: NTS	REV:

REVISIONS	CHNG	CHK	APP
	DATE	CHANGE	

SHEET 1 of 1