

Waterproof Accessories



*Hoods
Assembly & Molded*



Covers

Applications

Barcode Scanners

Medical

Industrial Peripherals

Surveillance & Security Equipment

Traffic Guidance

Marine

Specifications

Operating Temperature:
-25°C to +85°C

Shell: Steel

Insulator & Watertight Frame:
PBT Thermoplastic,
30% Glass filled UL-94V-0

O-Ring: Silicone

Contact: Copper Alloy
Standard: 9, 15, 25, 37, 50
High Density: 15, 26, 44, 62


Contact Current Rating:
Standard—5A
High Density—3A
Power—10A, 20A, 30A, & 40A

Protection: IP67 to IEC60529

Insulation Resistance:
5000 MΩ

Dielectric Withstanding Voltage:
1000 vDC for 1 minute

Waterproof D-sub

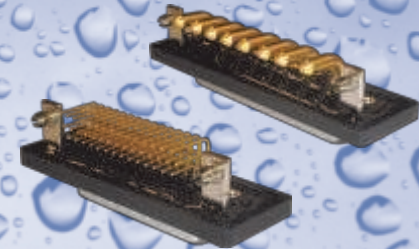

Visit www.powerdynamics.com for
detailed specifications & options

PDI[®]
Power Dynamics, Inc.

Standard

High Density

Power



Straight PC pin



R/A PC pin



Solder Cup

*Available with
9, 15, 25, 37 & 50 pins*



Straight PC pin



R/A PC pin



Solder Cup

*Available with
15, 26, 44 & 62 pins*

*Power Contact Ratings
10, 20, 30 & 40 Amp*



Straight PC pin



R/A PC pin



Solder Cup

*Available in
9, 15, 25 & 37 Shell Sizes*

*Visit www.powerdynamics.com for
detailed specifications & options*

IP 67 rated

7 E Frederick Pl, #100
Cedar Knolls, NJ 07927
Phone: 973-560-0019

www.powerdynamics.com

PDI[®]
Power Dynamics, Inc.