

# Lamp Holders



**P/N PD-FL-13**

Panel Thickness: 1.0 - 1.5 mm

Ⓡ Rapid Start

Quick Wire

Also available in black



**P/N PD-FL-18-11**

Panel thickness: 1.0 - 1.5 mm

Ⓡ Rapid Start

Quick Wire

Also available in black

# Specifications

**Max Operating Temperature**

120°C

**Body & Housing:**

Thermoplastic

**Flammability**

UL 94V-0

**Contacts**

Copper Alloy

**Wire Type**

18 AWG solid

**Max Electrical Ratings**

660W, 600V

**Bulb / Base Type**

T-8 (G13 base)

**Certifications**

UL 542


UL 496

CSA 22.2 / 43

RoHS

# Lighting Connectors

UL 2459 "touch-safe"

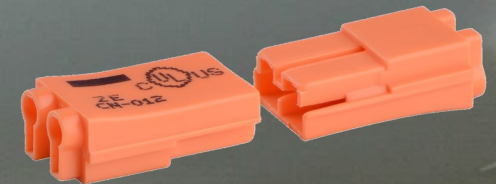

LED & Fluorescent



Visit [www.powerdynamics.com](http://www.powerdynamics.com) for  
detailed specifications


LED &  
Fluorescent

**PDI**<sup>®</sup>  
Power Dynamics, Inc.

# Luminaire Disconnect

# Luminaire Disconnect

# Specifications

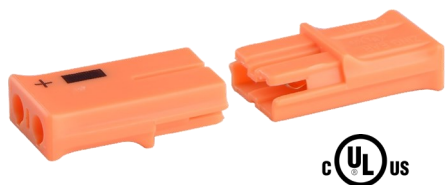

## P/N PD-CN-011

Wire Type: 18 AWG solid and  
Tin bonded copper




## P/N PD-CN-01

Wire Type:  
Line: 14-12 AWG  
Load: 18 AWG  
solid and tin bonded  
copper



## P/N PD-CN-012

Wire Type: 22-18 AWG solid  
Removable Wire

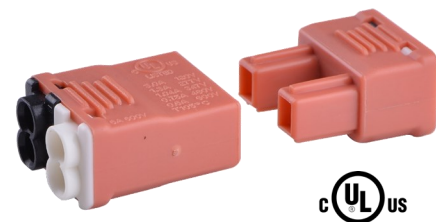

## P/N PD-CN-02

Wire Type:  
Line: 18-12 AWG  
Load: 18-12 AWG  
solid and tin bonded  
copper

**Max Operating Temperature**  
105°C

**Body & Housing**  
PA 66

**Flammability**  
UL 94V-0  
UL 94V-2 (PD-CN-012)

**Contacts**  
Copper Alloy

**Max Current Ratings**  
6A, 600VAC (PD-CN-02)  
3A, 120VAC (PD-CN-01, 02, 011, 012)  
1.3A, 277VAC (PD-CN-01, 02, 011, 012)  
1.04A, 347VAC (PD-CN-01, 02, 011, 012)  
0.75A, 480VAC (PD-CN-01, 02, 011, 012)  
0.6A, 600VAC (PD-CN-02, 011, 012)

**Certifications**  
UL 2459 "Touch Safe"  
CSA 22.2 / 2459  
NEC 410.73 (G)  
CEC 30-308 (4)  
RoHS

Visit [www.powerdynamics.com](http://www.powerdynamics.com) for  
detailed specifications

Meets  
NEC 410.73 &  
CEC 30-308

7 E Frederick Pl, Ste 100  
Cedar Knolls, NJ 07927  
973-560-0019 phone

[www.powerdynamics.com](http://www.powerdynamics.com)

**PDI**<sup>®</sup>  
Power Dynamics, Inc.